


7. BORU VE EK PARÇA ÖLÇÜM TABLOLARI

7.1 PE 32 Borular



DIN 8072


Tablo 7.1 PE 32 Boru Ölçü Tablosu

DIŞ ÇAP	SDR 21 - PN 2.6		SDR 9.4 - PN 6		SDR 6 - PN 10	
	S(mm)	Kg/m	S(mm)	Kg/m	S(mm)	Kg/m
20	-	-	2.2	0.124	3.4	0.174
25	-	-	2.7	0.186	4.2	0.269
32	-	-	3.5	0.310	5.4	0.439
40	2.0	0.24	4.3	0.475	6.7	0.629
50	2.4	0.363	5.4	0.741	8.3	1.06
63	3.0	0.561	6.8	1.17	10.5	1.67
75	3.6	0.801	8.1	1.66	12.5	2.36
90	4.3	1.15	9.7	2.37	15.0	3.40
110	5.3	1.72	11.8	3.52	18.3	5.09
125	6.0	2.19	13.4	4.55	20.8	6.56
140	6.7	2.75	-	-	-	-
160	7.7	3.60	-	-	-	-



PE 32 borular pratikte şehir şebekesinden, bina bağlantıları için ara geçiş borusu olarak kullanılmakta, boru kalın etli olduğu için boru uçlarına pafta ile dış açılarak metal geçiş bağlantılarına olanak vermektedir.

7.2 PE 63 Borular




ISO 4427-2
TS 418-2 EN 12201-2
DVGW GW 335-A2

Tablo 7.2 PE 63 Boru Ölçü Tablosu

da mm	SDR 41 - PN 2,5			SDR 26 - PN 4			SDR 17,6 - PN 6			SDR 11 - PN 10		
	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m
20										7.500.211.020	2.0	0.112
25										7.500.211.025	2.3	0.171
32							7.500.212.032	2.0	0.187	7.500.211.032	2.9	0.272
40				7.500.213.040	1.8	0.227	7.500.212.040	2.3	0.285	7.500.211.040	3.7	0.430
50				7.500.213.050	2.0	0.314	7.500.212.050	2.9	0.440	7.500.211.050	4.6	0.666
63				7.500.213.063	2.5	0.494	7.500.212.063	3.6	0.688	7.500.211.063	5.8	1.05
75				7.500.213.075	2.9	0.675	7.500.212.075	4.3	0.976	7.500.211.075	6.8	1.47
90				7.500.213.090	3.5	0.978	7.500.212.090	5.1	1.39	7.500.211.090	8.2	2.12
110				7.500.213.110	4.2	1.43	7.500.212.110	6.3	2.080	7.500.211.110	10.0	3.14
125				7.500.213.125	4.8	1.84	7.500.212.125	7.1	2.66	7.500.211.125	11.4	4.08
140				7.500.213.140	5.4	2.32	7.500.212.140	8.0	3.34	7.500.211.140	12.7	5.08
160				7.500.213.160	6.2	3.04	7.500.212.160	9.1	4.35	7.500.211.160	14.6	6.67
180				7.500.213.180	6.9	3.79	7.500.212.180	10.2	5.48	7.500.211.180	16.4	8.42
200				7.500.213.200	7.7	4.89	7.500.212.200	11.4	6.79	7.500.211.200	18.2	10.40
225				7.500.213.225	8.6	5.89	7.500.212.225	12.8	8.55	7.500.211.225	20.5	13.10
250				7.500.213.250	9.6	7.30	7.500.212.250	14.2	10.60	7.500.211.250	22.7	16.20
280				7.500.213.280	10.7	9.10	7.500.212.280	15.9	13.20	7.500.211.280	25.4	20.30
315	7.500.214.315	7.7	7.52	7.500.213.315	12.1	11.60	7.500.212.315	17.9	16.70	7.500.211.315	28.6	25.60
355	7.500.214.355	8.7	9.55	7.500.213.355	13.6	14.60	7.500.212.355	20.1	21.20	7.500.211.355	32.2	32.50
400	7.500.214.400	9.8	12.1	7.500.213.400	15.3	18.60	7.500.212.400	22.7	26.90	7.500.211.400	36.3	41.30
450	7.500.214.450	11.0	15.3	7.500.213.450	17.2	23.50	7.500.212.450	25.5	34	7.500.211.450	40.9	52.30
500	7.500.214.500	12.3	19.0	7.500.213.500	19.1	28.90	7.500.212.500	28.4	42	7.500.211.500	45.4	64.50
560	7.500.214.560	13.7	23.6	7.500.213.560	21.4	36.20	7.500.212.560	31.7	52.50	7.500.211.560	50.8	80.80
630	7.500.214.630	15.4	29.9	7.500.213.630	24.1	45.90	7.500.212.630	35.7	66.50	7.500.211.630	57.2	102
710	7.500.214.710	17.4	38.0	7.500.213.710	27.2	58.40	7.500.212.710	40.2	84.40	7.500.211.710	64.5	130
800	7.500.214.800	19.6	48.1	7.500.213.800	30.6	73.90	7.500.212.800	45.3	107			
900	7.500.214.900	22.0	60.9	7.500.213.900	34.4	93.40	7.500.212.900	51.0	136			
1000	7.500.214.910	24.5	75.2	7.500.213.910	38.2	115	7.500.212.910	56.6	167			
1200	7.500.214.920	29.4	108	7.500.213.920	45.9	166	7.500.212.920	68.0	241			
1400	7.500.214.940	34.4	147	7.500.213.940	53.5	226						
1600	7.500.214.960	39.2	192	7.500.213.960	61.2	295						

7.3 PE 80 Borular




ISO 4427-2
TS 418-2 EN 12201-2
DVGW GW 335-A2

Tablo 7.3 PE 80 Boru Ölçü Tablosu

da mm	SDR 33 - PN 4			SDR 13.6 - PN 10			SDR 11 - PN 12.5			SDR 9 - PN 16			SDR 7.4 - PN 20		
	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m
20							7.500.240.020	2.0	0.112	7.500.221.020	2.3	0.133	7.500.222.020	3.0	0.154
25							7.500.240.025	2.3	0.171	7.500.221.025	3.0	0.220	7.500.222.025	3.5	0.240
32				7.500.220.032	2.4	0.232	7.500.240.032	3.0	0.272	7.500.221.032	3.6	0.327	7.500.222.032	4.4	0.386
40				7.500.220.040	3.0	0.356	7.500.240.040	3.7	0.430	7.500.221.040	4.5	0.509	7.500.222.040	5.5	0.600
50				7.500.220.050	3.7	0.549	7.500.240.050	4.6	0.666	7.500.221.050	5.6	0.788	7.500.222.050	6.9	0.936
63				7.500.220.063	4.7	0.873	7.500.240.063	5.8	1.05	7.500.221.063	7.1	1.26	7.500.222.063	8.6	1.47
75				7.500.220.075	5.6	1.24	7.500.240.075	6.8	1.47	7.500.221.075	8.4	1.76	7.500.222.075	10.3	2.09
90				7.500.220.090	6.7	1.77	7.500.240.090	8.2	2.12	7.500.221.090	10.1	2.54	7.500.222.090	12.3	3.00
110				7.500.220.110	8.1	2.62	7.500.240.110	10.0	3.14	7.500.221.110	12.3	3.78	7.500.222.110	15.1	4.49
125				7.500.220.125	9.2	3.37	7.500.240.125	11.4	4.08	7.500.221.125	14.0	4.87	7.500.222.125	17.1	5.77
140				7.500.220.140	10.3	4.20	7.500.240.140	12.7	5.08	7.500.221.140	15.7	6.11	7.500.222.140	19.2	7.25
160				7.500.220.160	11.8	5.50	7.500.240.160	14.6	6.67	7.500.221.160	17.9	7.96	7.500.222.160	21.9	9.44
180				7.500.220.180	13.3	6.98	7.500.240.180	16.4	8.42	7.500.221.180	20.1	10.10	7.500.222.180	24.6	11.90
200				7.500.220.200	14.7	8.56	7.500.240.200	18.2	10.40	7.500.221.200	22.4	12.40	7.500.222.200	27.4	14.80
225				7.500.220.225	16.6	10.90	7.500.240.225	20.5	13.10	7.500.221.225	25.2	15.80	7.500.222.225	30.8	18.60
250				7.500.220.250	18.4	13.40	7.500.240.250	22.7	16.20	7.500.221.250	27.9	19.40	7.500.222.250	34.2	23.00
280				7.500.220.280	20.6	16.80	7.500.240.280	25.4	20.30	7.500.221.280	31.3	24.30	7.500.222.280	38.3	28.90
315	7.500.218.315	9.7	9.37	7.500.220.315	23.2	21.20	7.500.240.315	28.6	25.60	7.500.221.315	35.2	30.80	7.500.222.315	43.1	36.50
355	7.500.218.355	10.9	11.80	7.500.220.355	26.1	26.90	7.500.240.355	32.2	32.50	7.500.221.355	39.7	39.10	7.500.222.355	48.5	46.30
400	7.500.218.400	12.3	15.10	7.500.220.400	29.4	34.10	7.500.240.400	36.3	41.30	7.500.221.400	44.7	49.60	7.500.222.400	54.7	58.80
450	7.500.218.450	13.8	19.00	7.500.220.450	33.1	43.20	7.500.240.450	40.9	52.30	7.500.221.450	50.3	62.70	7.500.222.450	61.5	74.40
500	7.500.218.500	15.3	23.40	7.500.220.500	36.8	53.30	7.500.240.500	45.4	64.50	7.500.221.500	55.8	77.30			
560	7.500.218.560	17.2	29.40	7.500.220.560	41.2	66.90	7.500.240.560	50.8	80.80						
630	7.500.218.630	19.3	37.10	7.500.220.630	46.3	84.60	7.500.240.630	57.2	102						
710	7.500.218.710	21.8	47.20	7.500.220.710	52.2	107									
800	7.500.218.800	24.5	59.70	7.500.220.800	58.8	136									
900	7.500.218.900	27.6	75.60												
1000	7.500.218.910	30.6	93.10												
1200	7.500.218.920	36.7	134												
1400	7.500.218.940	42.9	183												
1600	7.500.218.960	49.0	238												

7.4 PE 100 Borular




ISO 4427-2
TS 418-2 EN 12201-2
DVGW GW 335-A2

Tablo 7.4 PE 100 Boru Ölçü Tablosu

da mm	SDR 41 - PN 4			SDR 33 - PN 5			SDR 27.6 - PN 6			SDR 21 - PN 8			SDR 17 - PN 10		
	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m
20															
25															
32													7.500.180.032	2.0	0.187
40										7.500.184.040	2.0	0.239	7.500.180.040	2.4	0.295
50							7.500.186.050	2.0	0.314	7.500.184.050	2.4	0.359	7.500.180.050	3.0	0.453
63							7.500.186.063	2.3	0.444	7.500.184.063	3.0	0.565	7.500.180.063	3.8	0.721
75							7.500.186.075	2.7	0.625	7.500.184.075	3.6	0.807	7.500.180.075	4.5	1.02
90							7.500.186.090	3.3	0.906	7.500.184.090	4.3	1.16	7.500.180.090	5.4	1.46
110							7.500.186.110	4.0	1.36	7.500.184.110	5.3	1.74	7.500.180.110	6.6	2.17
125							7.500.186.125	4.6	1.78	7.500.184.125	6.0	2.20	7.500.180.125	7.4	2.76
140							7.500.186.140	5.1	2.21	7.500.184.140	6.7	2.80	7.500.180.140	8.3	3.46
160							7.500.186.160	5.8	2.86	7.500.184.160	7.7	3.68	7.500.180.160	9.5	4.52
180							7.500.186.180	6.6	3.66	7.500.184.180	8.6	4.63	7.500.180.180	10.7	5.71
200							7.500.186.200	7.3	4.50	7.500.184.200	9.6	5.73	7.500.180.200	11.9	7.05
225							7.500.186.225	8.2	5.68	7.500.184.225	10.8	7.26	7.500.180.225	13.4	8.93
250							7.500.186.250	9.1	6.99	7.500.184.250	11.9	8.90	7.500.180.250	14.8	11.00
280							7.500.186.280	10.2	8.77	7.500.184.280	13.4	11.22	7.500.180.280	16.6	13.70
315	7.500.187.315	7.7	7.52	7.500.187.315	9.7	9.37	7.500.186.315	11.4	11.02	7.500.184.315	15.0	14.13	7.500.180.315	18.7	17.40
355	7.500.187.355	8.7	9.55	7.500.187.355	10.9	11.80	7.500.186.355	12.9	14.04	7.500.184.355	16.9	17.94	7.500.180.355	21.1	22.10
400	7.500.187.400	9.8	12.1	7.500.187.400	12.3	15.10	7.500.186.400	14.5	17.77	7.500.184.400	19.1	22.84	7.500.180.400	23.7	28.00
450	7.500.187.450	11.0	15.3	7.500.187.450	13.8	19.00	7.500.186.450	16.3	22.46	7.500.184.450	21.5	28.90	7.500.180.450	26.7	35.40
500	7.500.187.500	12.3	19.0	7.500.187.500	15.3	23.40	7.500.186.500	18.1	27.69	7.500.184.500	23.9	35.70	7.500.180.500	29.7	43.80
560	7.500.187.560	13.7	23.6	7.500.187.560	17.2	29.40	7.500.186.560	20.3	34.77	7.500.184.560	26.7	44.70	7.500.180.560	33.2	54.80
630	7.500.187.630	15.4	29.9	7.500.187.630	19.3	37.10	7.500.186.630	22.8	43.91	7.500.184.630	30.0	56.50	7.500.180.630	37.4	69.40
710	7.500.187.710	17.4	38.0	7.500.187.710	21.8	47.20	7.500.186.710	25.7	55.75	7.500.184.710	33.9	72.00	7.500.180.710	42.1	88
800	7.500.187.800	19.6	48.1	7.500.187.800	24.5	59.70	7.500.186.800	29.0	70.86	7.500.184.800	38.1	91.20	7.500.180.800	47.4	112
900	7.500.187.900	22.0	60.9	7.500.187.900	27.6	75.60	7.500.186.809	32.7	89	7.500.184.900	42.9	115	7.500.180.900	53.3	141
1000	7.500.187.910	24.5	75.2	7.500.187.910	30.6	93.10	7.500.186.810	36.3	110	7.500.184.910	47.7	143	7.500.180.910	59.3	175
1200	7.500.187.920	29.4	108	7.500.187.920	36.7	134	7.500.186.812	43.5	157	7.500.184.912	57.2	205	7.500.180.912		
1400	7.500.187.940	34.4	147	7.500.187.940	42.9	183	7.500.186.940	50.8	215	7.500.184.914					
1600	7.500.187.960	39.2	192	7.500.187.960	49	238	7.500.186.960	58.0	281	7.500.184.916					


7.4 PE 100 Borular



ISO 4427-2
TS 418-2 EN 12201-2
DVGW GW 335-A2

da mm	SDR 13.6 - PN 12.5			SDR 11 - PN 16			SDR 9 - PN 20			SDR 7.4 - PN 25		
	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m
20				7.500.176.020	2.0	0.112	7.500.172.020	2.3	0.133	7.500.171.020	3.0	0.154
25				7.500.176.025	2.3	0.171	7.500.172.025	3.0	0.220	7.500.171.025	3.5	0.240
32	7.500.175.032	2.4	0.232	7.500.176.032	3.0	0.272	7.500.172.032	3.6	0.327	7.500.171.032	4.4	0.386
40	7.500.175.040	3.0	0.356	7.500.176.040	3.7	0.430	7.500.172.040	4.5	0.509	7.500.171.040	5.5	0.600
50	7.500.175.050	3.7	0.549	7.500.176.050	4.6	0.666	7.500.172.050	5.6	0.788	7.500.171.050	6.9	0.936
63	7.500.175.063	4.7	0.873	7.500.176.063	5.8	1.05	7.500.172.063	7.1	1.26	7.500.171.063	8.6	1.47
75	7.500.175.075	5.6	1.24	7.500.176.075	6.8	1.47	7.500.172.075	8.4	1.76	7.500.171.075	10.3	2.09
90	7.500.175.090	6.7	1.77	7.500.176.090	8.2	2.12	7.500.172.090	10.1	2.54	7.500.171.090	12.3	3.00
110	7.500.175.110	8.1	2.62	7.500.176.110	10.0	3.14	7.500.172.110	12.3	3.78	7.500.171.110	15.1	4.49
125	7.500.175.125	9.2	3.37	7.500.176.125	11.4	4.08	7.500.172.125	14.0	4.87	7.500.171.125	17.1	5.77
140	7.500.175.140	10.3	4.22	7.500.176.140	12.7	5.08	7.500.172.140	15.7	6.11	7.500.171.140	19.2	7.25
160	7.500.175.160	11.8	5.50	7.500.176.160	14.6	6.67	7.500.172.160	17.9	7.96	7.500.171.160	21.9	9.44
180	7.500.175.180	13.3	6.98	7.500.176.180	16.4	8.42	7.500.172.180	20.1	10.10	7.500.171.180	24.6	11.90
200	7.500.175.200	14.7	8.56	7.500.176.200	18.2	10.40	7.500.172.200	22.4	12.40	7.500.171.200	27.4	14.80
225	7.500.175.225	16.6	10.90	7.500.176.225	20.5	13.10	7.500.172.225	25.2	15.80	7.500.171.225	30.8	18.60
250	7.500.175.250	18.4	13.40	7.500.176.250	22.7	16.20	7.500.172.250	27.9	19.40	7.500.171.250	34.2	23.00
280	7.500.175.280	20.6	16.80	7.500.176.280	25.4	20.30	7.500.172.280	31.3	24.30	7.500.171.280	38.3	28.90
315	7.500.175.315	23.2	21.20	7.500.176.315	28.6	25.60	7.500.172.315	35.2	30.80	7.500.171.315	43.1	36.50
355	7.500.175.355	26.1	26.90	7.500.176.355	32.2	32.50	7.500.172.355	39.7	39.10	7.500.171.355	48.5	46.30
400	7.500.175.400	29.4	34.10	7.500.176.400	36.3	41.30	7.500.172.400	44.7	49.60	7.500.171.400	54.7	58.80
450	7.500.175.450	33.1	43.20	7.500.176.450	40.9	52.30	7.500.172.450	50.3	62.70	7.500.171.450	61.5	74.40
500	7.500.175.500	36.8	53.30	7.500.176.500	45.4	64.50	7.500.172.500	55.8	77.30			
560	7.500.175.560	41.2	66.90	7.500.176.560	50.8	80.80	7.500.172.560					
630	7.500.175.630	46.3	84.60	7.500.176.630	57.2	102	7.500.172.630					
710	7.500.175.710	52.2	107	7.500.176.710								
800	7.500.175.800	58.8	136	7.500.176.800								
900	7.500.175.900											
1000	7.500.175.910											
1200												
1400												
1600												

7.5 PE 80 Doğalgaz Boruları

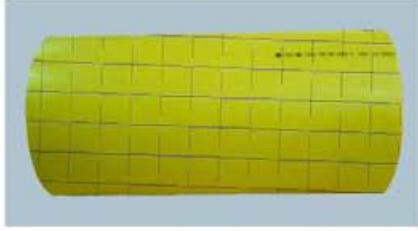


ISO 4437
TS EN 1555 - 2
DVGW GW 335-A2

Tablo 7.5 PE 80 Boru Ölçü Tablosu

da mm	SDR 17,6			SDR 11		
	Kodu	S mm	Kg/m	Kodu	S mm	Kg/m
20	7.130.001.020	2.3	0.128	7.130.000.020	3.0	0.160
25	7.130.001.025	2.3	0.164	7.130.000.025	3.0	0.221
32	7.130.001.032	2.3	0.214	7.130.000.032	3.0	0.280
40	7.130.001.040	2.3	0.272	7.130.000.040	3.7	0.430
50	7.130.001.050	2.9	0.472	7.130.000.050	4.6	0.670
63	7.130.001.063	3.6	0.671	7.130.000.063	5.8	1.060
75	7.130.001.075	4.3	0.955	7.130.000.075	6.8	1.500
90	7.130.001.090	5.2	1.385	7.130.000.090	8.2	2.140
110	7.130.001.110	6.3	2.050	7.130.000.110	10.0	3.170
125	7.130.001.125	7.1	2.630	7.130.000.125	11.4	4.100
140	7.130.001.140	8.0	3.315	7.130.000.140	12.7	5.150
160	7.130.001.160	9.1	4.310	7.130.000.160	14.6	6.710
180	7.130.001.180	10.3	5.490	7.130.000.180	16.4	8.400
200	7.130.001.200	11.4	6.750	7.130.000.200	18.2	10.450
225	7.130.001.225	12.8	8.530	7.130.000.225	20.5	13.220
250	7.130.001.250	14.2	10.515	7.130.000.250	22.7	16.310
280	7.130.001.280	15.9	13.200	7.130.000.280	25.4	20.440
315	7.130.001.315	17.9	16.700	7.130.000.315	28.6	25.860
355	7.130.001.355	20.2	21.235	7.130.000.355	32.3	34.120
400	7.130.001.400	22.8	27.000	7.130.000.400	36.4	43.340
450	7.130.001.450	25.6	34.100	7.130.000.450	40.9	54.940
500	7.130.001.500	28.4	42.000	7.130.000.500	45.5	67.760
560	7.130.001.560	31.9	55.000	7.130.000.560	50.9	84.920
630	7.130.001.630	35.8	69.200	7.130.000.630	57.3	107.560

7.6 Ek Parçalar

7.6.1 PE 100 EF Manşon

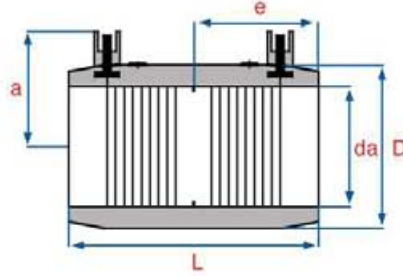


ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3
DIN 16963
DVGW GW 335 B 2

Tablo 7.6 PE 100 EF Manşon Ölçü Tablosu

da mm	L mm	e mm	D mm	a mm	SDR 11 - PN 16
					Kodu
20	80	40	31	34	755.44.16.020.0
25	85	40	36	37	755.44.16.025.0
32	92	43	44	40	755.44.16.032.0
40	103	48	54	44	755.44.16.040.0
50	112	54	66	49	755.44.16.050.0
63	129	62	83	56	755.44.16.063.0
75	133	68	96	62	755.44.16.075.0
90	141	70	114	69	755.44.16.090.0
110	152	75	140	79	755.44.16.110.0
125	171	85	161	87	755.44.16.125.0
140	181	90	180	94	755.44.16.140.0
160	180	90	200	104	755.44.16.160.0
180	202	99	222	114	755.44.16.180.0
200	217	106	246	124	755.44.16.200.0
225	232	115	276	137	755.44.16.225.0


7.6.2 PE 100 EF Tamir Adaptörü



ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3

Tablo 7.7 PE 100 EF Tamir Adaptörü Ölçü Tablosu

da mm	d1 mm	h mm	L mm	z mm	SDR 11 - PN 16
					Kodu
63	63	119	160	49	75.547.600.630
75	63	124	160	57	75.547.600.750
90	63	132	160	67	75.547.600.900
110	63	143	160	83	75.547.601.100
125	63	152	160	95	75.547.601.250
140	63	160	160	106	75.547.601.400
160	63	168	160	118	75.547.601.600
180	63	177	160	131	75.547.601.800
200	63	187	160	145	75.547.602.000
225	63	200	160	162	75.547.602.250

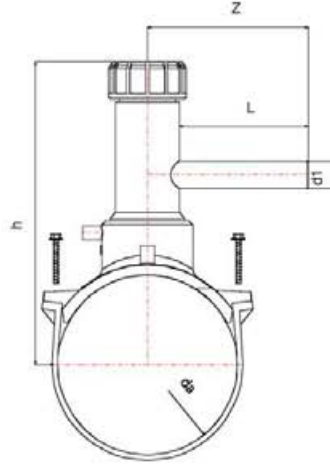
7.6.3 PE 100 EF Servis T Takım Düz


ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3

Tablo 7.8 PE 100 EF Servis T Takım Düz Ölçü Tablosu


da mm	d1 mm	h mm	L mm	z mm	SDR 11 - PN 16
					Kodu
63	20	184	96	130	755.41.16.063.0
63	25	219	81	130	755.41.16.063.1
63	32	184	96	130	755.41.16.063.2
63	40	219	103	137	755.41.16.063.3
63	50	219	113	147	755.41.16.063.4
63	63	219	133	167	755.41.16.063.5
75	20	189	96	130	755.41.16.075.0
75	25	224	81	130	755.41.16.075.1
75	32	189	96	130	755.41.16.075.2
75	40	224	103	137	755.41.16.075.3
75	50	224	113	147	755.41.16.075.4
75	63	224	133	167	755.41.16.075.5
90	20	197	96	130	755.41.16.090.0
90	25	232	81	130	755.41.16.090.1
90	32	197	96	130	755.41.16.090.2
90	40	232	103	137	755.41.16.090.3
90	50	232	113	147	755.41.16.090.4
90	63	232	133	167	755.41.16.090.5
110	20	208	96	130	755.41.16.110.0
110	25	243	81	130	755.41.16.110.1
110	32	208	96	130	755.41.16.110.2
110	40	243	103	137	755.41.16.110.3
110	50	243	113	147	755.41.16.110.4
110	63	243	133	167	755.41.16.110.5
125	20	217	96	130	755.41.16.125.0
125	25	252	81	130	755.41.16.125.1
125	32	217	96	130	755.41.16.125.2
125	40	252	103	137	755.41.16.125.3
125	50	252	113	147	755.41.16.125.4
125	63	252	133	167	755.41.16.125.5

7.6.3 PE 100 EF Servis T Takım Düz

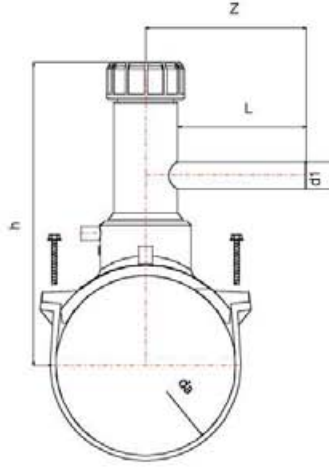

ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3

da mm	d1 mm	h mm	L mm	z mm	SDR 11 - PN 16
					Kodu
140	20	225	96	130	755.41.16.141.0
140	25	260	81	130	755.41.16.141.1
140	32	225	96	130	755.41.16.141.2
140	40	260	103	137	755.41.16.141.3
140	50	260	113	147	755.41.16.141.4
140	63	260	133	167	755.41.16.141.5
160	20	133	96	130	755.41.16.160.0
160	25	268	81	130	755.41.16.160.1
160	32	233	96	130	755.41.16.160.2
160	40	168	103	137	755.41.16.160.3
160	50	168	113	147	755.41.16.160.4
160	63	268	133	167	755.41.16.160.5
180	20	242	96	130	755.41.16.180.0
180	25	277	81	130	755.41.16.180.1
180	32	242	96	130	755.41.16.180.2
180	40	277	103	137	755.41.16.180.3
180	50	277	113	147	755.41.16.180.4
180	63	277	133	167	755.41.16.180.5
200	20	252	96	130	755.41.16.200.0
200	25	287	81	130	755.41.16.200.1
200	32	252	96	130	755.41.16.200.2
200	40	287	103	137	755.41.16.200.3
200	50	287	113	147	755.41.16.200.4
200	63	287	133	167	755.41.16.200.5
225	20	265	96	130	755.41.16.225.0
225	25	300	81	130	755.41.16.225.1
225	32	265	96	130	755.41.16.225.2
225	40	300	103	137	755.41.16.225.3
225	50	300	113	147	755.41.16.225.4
225	63	300	133	167	755.41.16.225.5

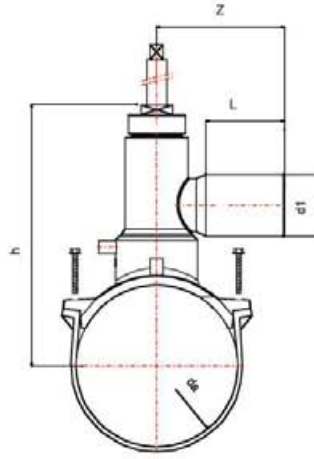
7.6.4 PE 100 EF Servis T Takım Vanalı


ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3

Tablo 7.9 PE 100 EF Servis T Takım Vanalı Ölçü Tablosu

da mm	d1 mm	h mm	L mm	z mm	SDR 11 - PN 16
					Kodu
63	20	192	80	130	755.40.16.063.0
63	25	192	80	130	755.40.16.063.1
63	32	192	80	130	755.40.16.063.2
63	40	192	80	130	755.40.16.063.3
63	50	192	80	130	755.40.16.063.4
63	63	192	80	130	755.40.16.063.5
75	20	197	80	130	755.40.16.075.0
75	25	197	80	130	755.40.16.075.1
75	32	197	80	130	755.40.16.075.2
75	40	197	80	130	755.40.16.075.3
75	50	197	80	130	755.40.16.075.4
75	63	197	80	130	755.40.16.075.5
90	20	205	80	130	755.40.16.090.0
90	25	205	80	130	755.40.16.090.1
90	32	205	80	130	755.40.16.090.2
90	40	205	80	130	755.40.16.090.3
90	50	205	80	130	755.40.16.090.4
90	63	205	80	130	755.40.16.090.5
110	20	216	80	130	755.40.16.110.0
110	25	216	80	130	755.40.16.110.1
110	32	216	80	130	755.40.16.110.2
110	40	216	80	130	755.40.16.110.3
110	50	216	80	130	755.40.16.110.4
110	63	216	80	130	755.40.16.110.5
125	20	225	80	130	755.40.16.125.0
125	25	225	80	130	755.40.16.125.1
125	32	225	80	130	755.40.16.125.2
125	40	225	80	130	755.40.16.125.3
125	50	225	80	130	755.40.16.125.4
125	63	225	80	130	755.40.16.125.5


7.6.4 PE 100 EF Servis T Takım Vanalı

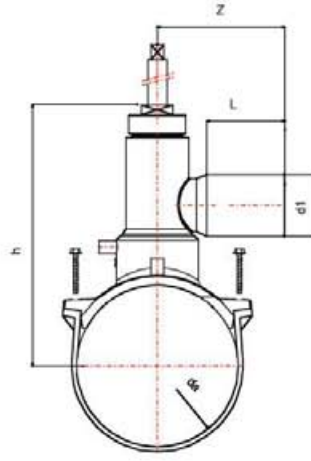

ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3

da mm	d1 mm	h mm	L mm	z mm	SDR 11 - PN 16
					Kodu
140	20	233	80	130	755.40.16.140.0
140	25	233	80	130	755.40.16.140.1
140	32	233	80	130	755.40.16.140.2
140	40	233	80	130	755.40.16.140.3
140	50	233	80	130	755.40.16.140.4
140	63	233	80	130	755.40.16.140.5
160	20	241	80	130	755.40.16.160.0
160	25	241	80	130	755.40.16.160.1
160	32	241	80	130	755.40.16.160.2
160	40	241	80	130	755.40.16.160.3
160	50	241	80	130	755.40.16.160.4
160	63	241	80	130	755.40.16.160.5
180	20	250	80	130	755.40.16.180.0
180	25	250	80	130	755.40.16.180.1
180	32	250	80	130	755.40.16.180.2
180	40	250	80	130	755.40.16.180.3
180	50	250	80	130	755.40.16.180.4
180	63	250	80	130	755.40.16.180.5
200	20	260	80	130	755.40.16.200.0
200	25	260	80	130	755.40.16.200.1
200	32	260	80	130	755.40.16.200.2
200	40	260	80	130	755.40.16.200.3
200	50	260	80	130	755.40.16.200.4
200	63	260	80	130	755.40.16.200.5
225	20	273	80	130	755.40.16.225.0
225	25	273	80	130	755.40.16.225.1
225	32	273	80	130	755.40.16.225.2
225	40	273	80	130	755.40.16.225.3
225	50	273	80	130	755.40.16.225.4
225	63	273	80	130	755.40.16.225.5

7.6.5 PE 100 Kör Tapa

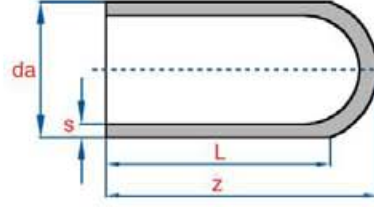


ISO 4427-3
TS418-3 EN12201-3
TS EN 1555-3
DVGW GW 335-B2

Tablo 7.10 PE 100 Kör Tapa Ölçü Tablosu

da mm	s mm	L mm	z mm	SDR 11 - PN 16
				Kodu
20	3.0	40	45	755.17.16.020.0
25	3.0	40	48	755.17.16.025.0
32	3.0	45	54	755.17.16.032.0
40	3.7	50	61	755.17.16.040.0
50	4.6	57	71	755.17.16.050.0
63	5.8	68	84	755.17.16.063.0
75	6.8	75	91	755.17.16.075.0
90	8.2	84	107	755.17.16.090.0
110	10.0	94	124	755.17.16.110.0
125	11.4	100	132	755.17.16.125.0
140	12.7	106	144	755.17.16.140.0
160	14.6	110	155	755.17.16.160.0
180	16.4	142	192	755.17.16.180.0
200	18.2	142	196	755.17.16.200.0
225	20.5	142	212	755.17.16.225.0


7.6.6 PE 100 EF Kör Tapa

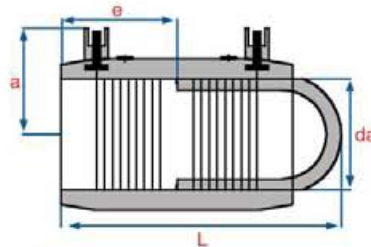

Tablo 7.11 PE 100 EF Kör Tapa Ölçü Tablosu

da mm	a mm	L mm	e mm	SDR 11 - PN 16
				Kodu
20	34	74	40	755.45.16.020.0
25	37	80	40	755.45.16.025.0
32	40	90	43	755.45.16.032.0
40	44	102	48	755.45.16.040.0
50	49	116	54	755.45.16.050.0
63	56	137	62	755.45.16.063.0
75	62	151	68	755.45.16.075.0
90	69	178	70	755.45.16.090.0
110	79	200	75	755.45.16.110.0
125	87	218	85	755.45.16.125.0
140	94	235	90	755.45.16.140.0
160	102	260	90	755.45.16.160.0
180	114	294	99	755.45.16.180.0
200	124	305	106	755.45.16.200.0
225	137	329	115	755.45.16.225.0

7.6.7 PE 100 İç Dişli Metal Geçiş Adaptörü

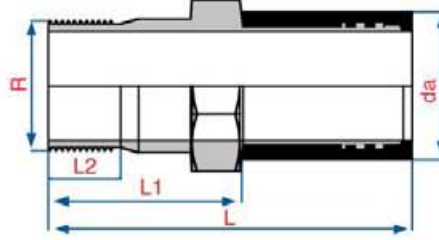


DIN 2999

Tablo 7.12 PE 100 İç Dişli Metal Geçiş Adaptörü Ölçü Tablosu

da mm	R mm	L mm	L1 mm	L2 mm	SDR 11 - PN 16
					Kodu
20	1/2"	89	50	8	755.32.16.020.0
25	3/4"	91	50	8	755.32.16.025.0
32	1"	104	59	9	755.32.16.032.0
40	1.1/4"	128	68	10	755.32.16.040.0
50	1.1/2"	138	74	12	755.32.16.050.0
63	2"	152	80	14	755.32.16.063.0
75	2.1/2"	163	84	20	755.32.16.075.0



7.6.8 PE 100 Dış Dişli Metal Geçiş Adaptörü

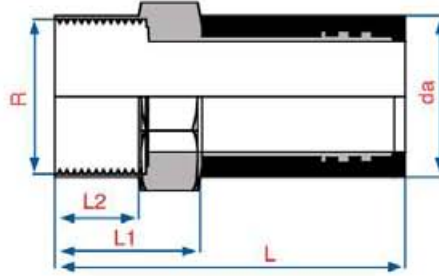

DIN 2999


Tablo 7.13 PE 100 Dış Dişli Metal Geçiş Adaptörü Ölçü Tablosu

da mm	R mm	L mm	L1 mm	L2 mm	SDR 11 - PN 16
					Kodu
20	1/2"	103	64	20	755.34.16.020.0
25	3/4"	105	64	22	755.34.16.025.0
32	1"	117	72	25	755.34.16.032.0
40	1.1/4"	144	84	28	755.34.16.040.0
50	1.1/2"	152	88	34	755.34.16.050.0
63	2"	176	104	42	755.34.16.063.0
75	2.1/2"	187	108	52	755.34.16.063.0

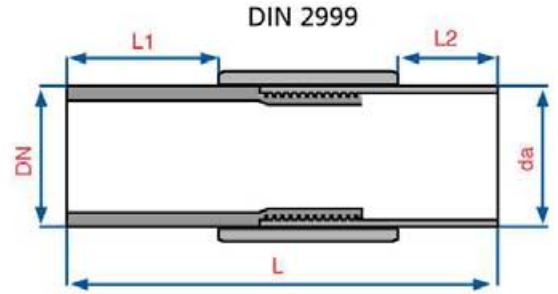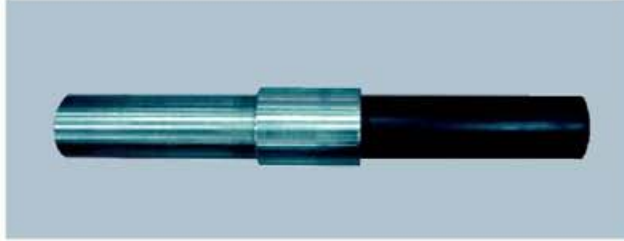7.6.9 PE 100 Kaynaklı Çelik Geçiş Adaptörü

Tablo 7.14 PE 100 Kaynaklı Çelik Geçiş Adaptörü Ölçü Tablosu

da mm	DN mm	L mm	L1 mm	L2 mm	SDR 11 - PN 16
					Kodu
20	16	420	180	180	755.30.16.020.0
25	20	430	180	180	755.30.16.025.0
32	25	480	200	200	755.30.16.032.0
40	32	490	200	200	755.30.16.040.0
50	40	500	200	200	755.30.16.050.0
63	50	510	200	200	755.30.16.063.0
75	65	640	250	250	755.30.16.075.0
90	80	660	250	250	755.30.16.090.0
110	100	760	300	300	755.30.16.110.0

7.6.10 PE 100 90° Dirsek (Enjeksiyon)




ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

Tablo 7.15 PE 100 90° Dirsek (Enjeksiyon) Ölçü Tablosu

da mm	L mm	z mm	SDR 17 - PN 10		SDR 11 - PN 16	
			Kodu	S mm.	Kodu	S mm.
25	45	65			755.04.16.025.0	2.3
32	50	70			755.04.16.032.0	3.0
40	55	80			755.04.16.040.0	3.7
50	55	84			755.04.16.050.0	4.6
63	64	98	755.04.10.063.0	3.8	755.04.16.063.0	3.8
75	70	109	755.04.10.075.0	4.5	755.04.16.075.0	6.8
90	80	130	755.04.10.090.0	5.4	755.04.16.090.0	8.2
110	90	147	755.04.10.110.0	6.6	755.04.16.116.0	10.0
125	90	177	755.04.10.125.0	7.4	755.04.16.125.0	11.4
140	95	190	755.04.10.140.0	8.3	755.04.16.140.0	12.7
160	103	205	755.04.10.160.0	9.5	755.04.16.160.0	14.6
180	105	223	755.04.10.180.0	10.7	755.04.16.180.0	16.4
200	115	246	755.04.10.200.0	11.9	755.04.16.200.0	18.2
225	125	270	755.04.10.225.0	13.4	755.04.16.225.0	20.5

7.6.11 PE 100 90° Dirsek (Konfeksiyon)




DIN 16963

Tablo 7.16 PE 100 90° Dirsek (Konfeksiyon) Ölçü Tablosu

da mm	L mm	R mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
250	250	375	548	755.04.06.250.0	9.1	755.04.10.250.0	14.8	755.04.16.250.0	22.7
280	250	420	585	755.04.06.280.0	10.2	755.04.10.280.0	16.6	755.04.16.280.0	25.4
315	300	473	676	755.04.06.315.0	11.4	755.04.10.315.0	18.7	755.04.16.315.0	28.6
355	300	533	724	755.04.06.355.0	12.9	755.04.10.355.0	21.1	755.04.16.355.0	32.2
400	300	600	778	755.04.06.400.0	14.5	755.04.10.400.0	23.7	755.04.16.400.0	36.3
450	300	675	838	755.04.06.450.0	16.3	755.04.10.450.0	26.7	755.04.16.450.0	40.9
500	300	750	897	755.04.06.500.0	18.1	755.04.10.500.0	29.7	755.04.16.500.0	45.4
560	350	840	1019	755.04.06.560.0	20.3	755.04.10.560.0	33.2	755.04.16.560.0	50.8
630	350	945	1103	755.04.06.630.0	22.8	755.04.10.630.0	37.4	755.04.16.630.0	57.2
710	350	1065	1198	755.04.06.710.0	25.7	755.04.10.710.0	42.1	755.04.16.710.0	64.5
800	350	1200	1306	755.04.06.800.0	29.0	755.04.10.800.0	47.4	755.04.16.800.0	72.7
900	400	1350	1475	755.04.06.900.0	32.6	755.04.10.900.0	53.3		
1000	400	1500	1595	755.04.06.910.0	36.2	755.04.10.910.0	59.3		
1200	400	1800	1834	755.04.06.920.0	43.5	755.04.10.920.0	70.6		

7.6.12 PE 100 60° Dirsek (Konfeksiyon)

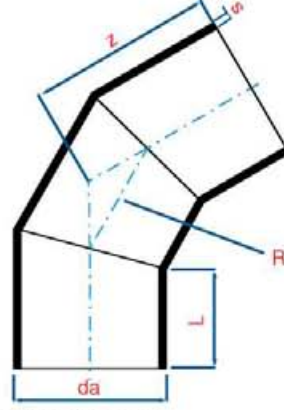


DIN 16963

Tablo 7.17 PE 100 60° Dirsek (Konfeksiyon) Ölçü Tablosu

da mm	L mm	R mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
90	150	130	202	755.03.06.090.0	3.30	755.03.10.090.0	5.40	755.03.16.090.0	8.20
110	150	165	211	755.03.06.110.0	4.00	755.03.10.110.0	6.60	755.03.16.110.0	10.00
125	150	188	223	755.03.06.125.0	4.60	755.03.10.125.0	7.40	755.03.16.125.0	11.40
140	150	210	231	755.03.06.140.0	5.10	755.03.10.140.0	8.30	755.03.16.140.0	12.70
160	150	240	243	755.03.06.160.0	5.80	755.03.10.160.0	9.50	755.03.16.160.0	14.60
180	150	270	255	755.03.06.180.0	6.60	755.03.10.180.0	10.70	755.03.16.180.0	16.40
200	150	300	266	755.03.06.200.0	7.30	755.03.10.200.0	11.90	755.03.16.200.0	18.20
225	150	338	281	755.03.06.225.0	8.20	755.03.10.225.0	13.40	755.03.16.225.0	20.50
250	250	375	345	755.03.06.250.0	9.10	755.03.10.250.0	14.80	755.03.16.250.0	22.70
280	250	420	363	755.03.06.280.0	10.20	755.03.10.280.0	16.60	755.03.16.280.0	25.40
315	300	473	484	755.03.06.315.0	11.40	755.03.10.315.0	18.70	755.03.16.315.0	28.60
355	300	533	507	755.03.06.355.0	12.90	755.03.10.355.0	21.10	755.03.16.355.0	32.20
400	300	600	533	755.03.06.400.0	14.50	755.03.10.400.0	23.70	755.03.16.400.0	36.30
450	300	675	562	755.03.06.450.0	16.30	755.03.10.450.0	26.70	755.03.16.450.0	40.90
500	300	750	591	755.03.06.500.0	18.10	755.03.10.500.0	29.70	755.03.16.500.0	45.40
560	350	840	676	755.03.06.560.0	20.30	755.03.10.560.0	33.20	755.03.16.560.0	50.80
630	350	945	717	755.03.06.630.0	22.80	755.03.10.630.0	37.40	755.03.16.630.0	57.20
710	350	1065	763	755.03.06.710.0	25.70	755.03.10.710.0	42.10	755.03.16.710.0	64.50
800	350	1200	816	755.03.06.800.0	29.00	755.03.10.800.0	47.40	755.03.16.800.0	72.70
900	400	1350	928	755.03.06.900.0	32.60	755.03.10.900.0	53.30		
1000	400	1500	983	755.03.06.910.0	36.20	755.03.10.910.0	59.30		
1200	400	1800	1099	755.03.06.920.0	43.50	755.03.10.920.0	70.60		

7.6.13 PE 100 45° Dirsek (Enjeksiyon)




ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

Tablo 7.18 PE 100 45° Dirsek (Enjeksiyon) Ölçü Tablosu

da mm	L mm	z mm	SDR 17 - PN 10		SDR 11 - PN 16	
			Kodu	S mm.	Kodu	S mm.
25	45	65			755.02.16.025.0	2.3
32	50	70			755.02.16.032.0	3.0
40	55	80			755.02.16.040.0	3.7
50	55	84			755.02.16.050.0	4.6
63	64	98	755.02.10.063.0	3.8	755.02.16.063.0	5.8
75	70	109	755.02.10.075.0	4.5	755.02.16.075.0	6.8
90	80	130	755.02.10.090.0	4.5	755.02.16.090.0	8.2
110	90	90	755.02.10.110.0	6.6	755.02.16.110.0	10.0
125	90	177	755.02.10.125.0	7.4	755.02.16.125.0	11.4
140	95	190	755.02.10.140.0	8.3	755.02.16.140.0	12.7
160	103	205	755.02.10.160.0	9.5	755.02.16.160.0	14.6
180	105	223	755.02.10.180.0	10.7	755.02.16.180.0	16.4
200	115	246	755.02.10.200.0	11.9	755.02.16.200.0	18.2
225	125	270	755.02.10.225.0	13.4	755.02.16.225.0	20.5



7.6.14 PE 100 45° Dirsek (Konfeksiyon)



Tablo 7.19 PE 100 45° Dirsek (Konfeksiyon) Ölçü Tablosu

da mm	L mm	R mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
250	250	375	354	755.02.06.250.0	9.1	755.02.10.250.0	14.8	755.02.16.250.0	22.7
280	250	420	367	755.02.06.280.0	10.2	755.02.10.280.0	16.6	755.02.16.280.0	25.4
315	300	473	431	755.02.06.315.0	11.4	755.02.10.315.0	18.7	755.02.16.315.0	28.6
355	300	533	447	755.02.06.355.0	12.9	755.02.10.355.0	21.1	755.02.16.355.0	32.2
400	300	600	467	755.02.06.400.0	14.5	755.02.10.400.0	23.7	755.02.16.400.0	36.3
450	300	675	487	755.02.06.450.0	165.3	755.02.10.450.0	26.7	755.02.16.450.0	40.9
500	300	750	508	755.02.06.500.0	18.1	755.02.10.500.0	29.7	755.02.16.500.0	45.4
560	350	840	583	755.02.06.560.0	20.3	755.02.10.560.0	33.2	755.02.16.560.0	50.8
630	350	945	612	755.02.06.630.0	22.8	755.02.10.630.0	37.4	755.02.16.630.0	57.2
710	350	1065	646	755.02.06.710.0	25.7	755.02.10.710.0	42.1	755.02.16.710.0	64.5
800	350	1200	683	755.02.06.800.0	29.0	755.02.10.800.0	47.4	755.02.16.800.0	72.7
900	400	1350	774	755.02.06.900.0	32.6	755.02.10.900.0	53.3		
1000	400	1500	816	755.02.06.910.0	36.2	755.02.10.910.0	59.3		
1200	400	1800	899	755.02.06.920.0	43.5	755.02.10.920.0	70.6		

7.6.15 PE 100 30° Dirsek (Konfeksiyon)

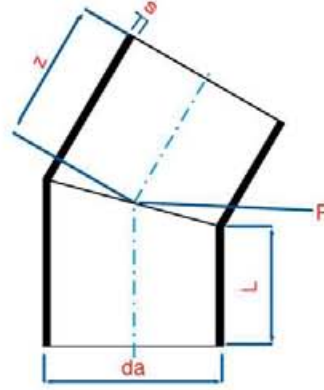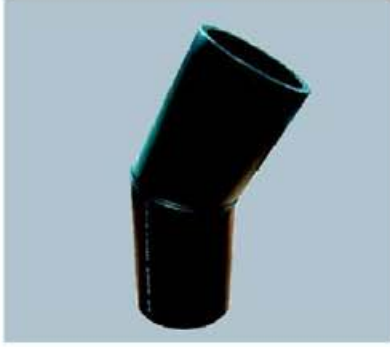


ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

Tablo 7.20 PE 100 30° Dirsek (Konfeksiyon) Ölçü Tablosu

da mm	L mm	R mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
90	150	135	162	755.01.06.090.0	3.3	755.01.10.090.0	5.4	755.01.16.090.0	8.2
110	150	165	165	755.01.06.110.0	4.00	755.01.10.110.0	6.60	755.01.16.110.0	10.00
125	150	188	167	755.01.06.125.0	4.60	755.01.10.125.0	7.40	755.01.16.125.0	11.40
140	150	210	168	755.01.06.140.0	5.10	755.01.10.140.0	8.30	755.01.16.140.0	12.70
160	150	240	171	755.01.06.160.0	5.80	755.01.10.160.0	9.50	755.01.16.160.0	14.60
180	150	270	174	755.01.06.180.0	6.60	755.01.10.180.0	10.70	755.01.16.180.0	16.40
200	150	300	177	755.01.06.200.0	7.30	755.01.10.200.0	11.90	755.01.16.200.0	18.20
225	150	338	180	755.01.06.225.0	8.20	755.01.10.225.0	13.40	755.01.16.225.0	20.50
250	250	375	283	755.01.06.250.0	9.10	755.01.10.250.0	14.80	755.01.16.250.0	22.70
280	250	420	288	755.01.06.280.0	10.20	755.01.10.280.0	16.60	755.01.16.280.0	25.40
315	300	473	342	755.01.06.315.0	11.40	755.01.10.315.0	18.70	755.01.16.315.0	28.60
355	300	533	348	755.01.06.355.0	12.90	755.01.10.355.0	21.10	755.01.16.355.0	32.20
400	300	600	353	755.01.06.400.0	14.50	755.01.10.400.0	23.70	755.01.16.400.0	36.30
450	300	675	361	755.01.06.450.0	16.30	755.01.10.450.0	26.70	755.01.16.450.0	40.90
500	300	750	367	755.01.06.500.0	18.10	755.01.10.500.0	29.70	755.01.16.500.0	45.40
560	350	840	425	755.01.06.560.0	20.30	755.01.10.560.0	33.20	755.01.16.560.0	50.80
630	350	945	435	755.01.06.630.0	22.80	755.01.10.630.0	37.40	755.01.16.630.0	57.20
710	350	1065	445	755.01.06.710.0	25.70	755.01.10.710.0	42.10	755.01.16.710.0	64.50
800	350	1200	458	755.01.06.800.0	29.00	755.01.10.800.0	47.40	755.01.16.800.0	72.70
900	400	1350	520	755.01.06.900.0	32.60	755.01.10.900.0	53.30		
1000	400	1500	534	755.01.06.910.0	36.20	755.01.10.910.0	59.30		
1200	400	1800	561	755.01.06.920.0	43.50	755.01.10.920.0	70.60		

7.6.16 PE 100 Eşit T (Enjeksiyon)




ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

Tablo 7.21 PE 100 Eşit T (Enjeksiyon) Ölçü Tablosu

da mm	L mm	I mm	z mm	SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.
20	107	35	54			755.14.16.020.0	3.0
25	117	40	59			755.14.16.025.0	3.0
32	144	45	71			755.14.16.032.0	3.0
40	168	51	84			755.14.16.040.0	3.7
50	189	57	95			755.14.16.050.0	4.6
63	224	65	112	755.14.10.063.0	3.8	755.14.16.063.0	5.8
75	260	71	128	755.14.10.075.0	4.5	755.14.16.075.0	6.8
90	286	80	143	755.14.10.090.0	5.4	755.14.16.090.0	8.2
110	317	86	158	755.14.10.110.0	6.6	755.14.16.110.0	10.0
125	353	92	175	755.14.10.125.0	7.4	755.14.16.125.0	11.4
140	380	98	190	755.14.10.140.0	8.3	755.14.16.140.0	12.7
160	408	100	200	755.14.10.160.0	9.5	755.14.16.160.0	14.6
180	521	133	260	755.14.10.180.0	10.7	755.14.16.180.0	16.4
200	493	117	246	755.14.10.200.0	11.9	755.14.16.200.0	18.2
225	548	125	271	755.14.10.225.0	13.4	755.14.16.225.0	20.5



7.6.17 PE 100 Eşit T (Konfeksiyon)



Tablo 7.22 PE 100 Eşit T (Konfeksiyon) Ölçü Tablosu

da mm	L mm	I mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
110	410	150	205	755.14.06.110.0	4.0	755.14.10.110.0	6.6	755.14.16.110.0	10.0
125	430	152.5	215	755.14.06.125.0	4.6	755.14.10.125.0	7.4	755.14.16.125.0	11.4
140	440	150	220	755.14.06.140.0	5.1	755.14.10.140.0	8.3	755.14.16.140.0	12.7
160	460	150	230	755.14.06.160.0	5.8	755.14.10.160.0	9.5	755.14.16.160.0	14.6
180	480	150	240	755.14.06.180.0	6.6	755.14.10.180.0	10.7	755.14.16.180.0	16.4
200	500	150	250	755.14.06.200.0	7.3	755.14.10.200.0	11.9	755.14.16.200.0	18.2
225	530	152.5	265	755.14.06.225.0	8.2	755.14.10.225.0	13.4	755.14.16.225.0	20.5
250	750	250	375	755.14.06.250.0	9.1	755.14.10.250.0	14.8	755.14.16.250.0	22.7
280	780	250	390	755.14.06.280.0	10.2	755.14.10.280.0	16.6	755.14.16.280.0	25.4
315	930	302.5	460	755.14.06.315.0	11.4	755.14.10.315.0	18.7	755.14.16.315.0	28.6
355	860	302.5	480	755.14.06.355.0	12.9	755.14.10.355.0	21.1	755.14.16.355.0	32.2
400	1000	300	500	755.14.06.400.0	14.5	755.14.10.400.0	23.7	755.14.16.400.0	36.3
450	1050	300	525	755.14.06.450.0	16.3	755.14.10.450.0	26.7	755.14.16.450.0	40.9
500	1200	350	600	755.14.06.500.0	18.1	755.14.10.500.0	29.7	755.14.16.500.0	45.4
560	1260	350	630	755.14.06.560.0	20.3	755.14.10.560.0	33.2	755.14.16.560.0	50.8
630	1330	350	665	755.14.06.630.0	22.8	755.14.10.630.0	37.4	755.14.16.630.0	57.2
710	1410	350	705	755.14.06.710.0	25.7	755.14.10.710.0	42.1	755.14.16.710.0	64.5
800	1500	350	750	755.14.06.800.0	29.0	755.14.10.800.0	47.4	755.14.16.800.0	72.7
900	1700	400	850	755.14.06.900.0	32.6	755.14.10.900.0	53.3	755.14.16.900.0	81.8
1000	1800	400	900	755.14.06.910.0	36.2	755.14.10.910.0	59.3	755.14.16.910.0	90.9
1200	2000	400	1000	755.14.06.920.0	43.5	755.14.10.920.0	70.6		

7.6.18 PE 100 İnegal T





ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

Tablo 7.23 PE 100 İnegal T Ölçü Tablosu

da 1 mm	da 2 mm	L mm	i mm	z mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
					Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
140	90	380	79	200	755.15.06.140.1	5.1	3.3	755.15.10.140.1	8.3	5.4	755.15.16.140.1	12.7	8.2
140	110	400	82	200	755.15.06.140.2	5.1	4.0	755.15.10.140.2	8.3	6.6	755.15.16.140.2	12.7	10.8
140	125	400	87	200	755.15.06.140.3	5.1	4.6	755.15.10.140.3	8.3	7.4	755.15.16.140.3	12.7	11.4
160	90	395	79	210	755.15.06.160.3	5.8	3.3	755.15.10.160.3	9.5	5.4	755.15.16.160.3	14.6	8.2
160	110	415	82	210	755.15.06.160.4	5.8	4.0	755.15.10.160.4	9.5	6.6	755.15.16.160.4	14.6	10.0
160	125	430	87	210	755.15.06.160.5	5.8	4.6	755.15.10.160.5	9.5	7.4	755.15.16.160.5	14.6	11.4
160	140	445	92	210	755.15.06.160.6	5.8	5.1	755.15.10.160.6	9.5	8.3	755.15.16.160.6	14.3	12.7
180	90	425	79	220	755.15.06.180.2	6.6	3.3	755.15.10.180.2	10.7	5.4	755.15.16.180.2	16.4	8.2
180	110	446	82	220	755.15.06.180.3	6.6	4.0	755.15.10.180.3	10.7	6.6	755.15.16.180.3	16.4	10.0
180	125	456	87	220	755.15.06.180.4	6.6	4.6	755.15.10.180.4	10.7	7.4	755.15.16.180.4	16.4	11.4
180	140	480	92	230	755.15.06.180.5	6.6	5.1	755.15.10.180.5	10.7	8.3	755.15.16.180.5	16.4	12.7
180	160	500	98	230	755.15.06.180.6	6.6	5.8	755.15.10.180.6	10.7	9.5	755.15.16.180.6	16.4	14.6
200	90	428	79	230	755.15.06.200.1	7.3	3.3	755.15.10.200.1	11.9	5.4	755.15.16.200.1	18.2	8.2
200	110	445	82	230	755.15.06.200.2	7.3	4.0	755.15.10.200.2	11.9	6.6	755.15.16.200.2	18.2	10.0
200	125	460	87	230	755.15.06.200.3	7.3	4.6	755.15.10.200.3	11.9	7.4	755.15.16.200.3	18.2	11.4
200	140	470	92	240	755.15.06.200.4	7.3	5.1	755.15.10.200.4	11.9	8.3	755.15.16.200.4	18.2	12.7
200	160	490	98	240	755.15.06.200.5	7.3	5.8	755.15.10.200.5	11.9	9.5	755.15.16.200.5	18.2	14.6
200	180	510	105	260	755.15.06.200.6	7.3	6.6	755.15.10.200.6	11.9	10.7	755.15.16.200.6	18.2	16.4
225	90	430	79	243	755.15.06.225.1	8.2	3.3	755.15.10.225.1	13.4	5.4	755.15.16.225.1	20.5	8.2
225	110	440	82	243	755.15.06.225.2	8.2	4.0	755.15.10.225.2	13.4	6.6	755.15.16.225.2	20.5	10.0
225	125	458	87	243	755.15.06.225.3	8.2	4.6	755.15.10.225.3	13.4	7.4	755.15.16.225.3	20.5	11.4
225	140	495	92	253	755.15.06.225.4	8.2	5.1	755.15.10.225.4	13.4	8.3	755.15.16.225.4	20.5	12.7
225	160	495	98	253	755.15.06.225.5	8.2	5.8	755.15.10.225.5	13.4	9.5	755.15.16.225.5	20.5	14.6
225	180	600	105	273	755.15.06.225.6	8.2	6.6	755.15.10.225.6	13.4	10.7	755.15.16.225.6	20.5	16.4
250	90	620	79	273	755.15.06.250.1	9.1	3.3	755.15.10.250.1	14.8	5.4	755.15.16.250.1	22.7	8.2
250	110	465	82	255	755.15.06.250.2	9.1	4.0	755.15.10.250.2	14.8	6.6	755.15.16.250.2	22.7	10.0
250	125	480	87	255	755.15.06.250.3	9.1	4.6	755.15.10.250.3	14.8	7.4	755.15.16.250.3	22.7	11.4
250	140	480	92	265	755.15.06.250.4	9.1	5.1	755.15.10.250.4	14.8	8.3	755.15.16.250.4	22.7	12.7
250	160	515	98	265	755.15.06.250.5	9.1	5.8	755.15.10.250.5	14.8	9.5	755.15.16.250.5	22.7	14.6
250	180	515	105	285	755.15.06.250.6	9.1	6.6	755.15.10.250.6	14.8	10.7	755.15.16.250.6	22.7	16.4
250	200	515	112	285	755.15.06.250.7	9.1	7.3	755.15.10.250.7	14.8	11.9	755.15.16.250.7	22.7	18.2
250	225	520	120	295	755.15.06.250.8	9.1	8.2	755.15.10.250.8	14.8	13.4	755.15.16.250.8	22.7	20.5
280	90	400	79	270	755.15.06.280.0	10.2	3.3	755.15.10.280.0	16.6	5.4	755.15.16.280.0	25.4	8.2
280	110	430	82	270	755.15.06.280.1	10.2	4.0	755.15.10.280.1	16.6	6.6	755.15.16.280.1	25.4	10.0
280	125	450	87	270	755.15.06.280.2	10.2	4.6	755.15.10.280.2	16.6	7.4	755.15.16.280.2	25.4	11.4
280	140	470	92	280	755.15.06.280.3	10.2	5.1	755.15.10.280.3	16.6	8.3	755.15.16.280.3	25.4	12.7
280	160	485	98	280	755.15.06.280.4	10.2	5.8	755.15.10.280.4	16.6	9.5	755.15.16.280.4	25.4	14.6



7.6.18 PE 100 Inegal T



ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

da 1 mm	da 2 mm	L mm	l mm	z mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
					Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
280	180	495	105	300	755.15.06.280.5	10.2	6.6	755.15.10.280.5	16.6	10.7	755.15.16.280.5	25.4	16.4
280	200	505	112	300	755.15.06.280.6	10.2	7.3	755.15.10.280.6	16.6	11.9	755.15.16.280.6	25.4	18.2
280	225	525	120	310	755.15.06.280.7	10.2	8.2	755.15.10.280.7	16.6	13.4	755.15.16.280.7	25.4	20.5
280	250	550	129	310	755.15.06.280.8	10.2	9.1	755.15.10.280.8	16.6	14.8	755.15.16.280.8	25.4	22.7
315	110	455	82	288	755.15.06.315.0	11.4	4.0	755.15.10.315.0	18.7	6.6	755.15.16.315.0	28.6	10.0
315	125	480	87	288	755.15.06.315.1	11.4	4.6	755.15.10.315.1	18.7	7.4	755.15.16.315.1	28.6	11.4
315	140	490	92	298	755.15.06.315.2	11.4	5.1	755.15.10.315.2	18.7	8.3	755.15.16.315.2	28.6	12.7
315	160	500	98	298	755.15.06.315.3	11.4	5.8	755.15.10.315.3	18.7	9.5	755.15.16.315.3	28.6	14.6
315	180	525	105	318	755.15.06.315.4	11.4	6.6	755.15.10.315.4	18.7	10.7	755.15.16.315.4	28.6	16.4
315	200	555	112	318	755.15.06.315.5	11.4	7.3	755.15.10.315.5	18.7	11.9	755.15.16.315.5	28.6	18.2
315	225	575	120	328	755.15.06.315.6	11.4	8.2	755.15.10.315.6	18.7	13.4	755.15.16.315.6	28.6	20.5
315	250	595	129	328	755.15.06.315.7	11.4	9.1	755.15.10.315.7	18.7	14.8	755.15.16.315.7	28.6	22.7
315	280	630	139	338	755.15.06.315.8	11.4	10.2	755.15.10.315.8	18.7	16.6	755.15.16.315.8	28.6	25.4
355	110	460	82	308	755.15.06.355.1	12.9	4.0	755.15.10.355.1	21.1	6.6	755.15.16.355.1	32.2	10.0
355	125	475	87	308	755.15.06.355.2	12.9	4.6	755.15.10.355.2	21.1	7.4	755.15.16.355.2	32.2	11.4
355	140	490	92	318	755.15.06.355.3	12.9	5.1	755.15.10.355.3	21.1	8.3	755.15.16.355.3	32.2	12.7
355	160	510	98	318	755.15.06.355.4	12.9	5.8	755.15.10.355.4	21.1	9.5	755.15.16.355.4	32.2	16.4
355	180	530	105	338	755.15.06.355.5	12.9	6.6	755.15.10.355.5	21.1	10.7	755.15.16.355.5	32.2	16.4
355	200	550	112	353	755.15.06.355.6	12.9	7.3	755.15.10.355.6	21.1	11.9	755.15.16.355.6	32.2	18.2
355	225	575	120	358	755.15.06.355.7	12.9	8.2	755.15.10.355.6	21.1	13.4	755.15.16.355.6	32.2	20.5
355	250	600	129	348	355.15.06.355.7	12.9	9.1	755.15.10.355.7	21.1	14.8	755.15.16.355.7	32.2	22.7
355	280	630	139	358	755.15.06.355.8	12.9	10.2	755.15.10.355.8	21.1	16.6	755.15.16.355.8	32.2	25.4
355	315	665	150	378	755.15.06.355.9	12.9	11.4	755.15.10.355.9	21.1	18.7	755.15.16.355.9	32.2	28.6
400	110	515	82	330	755.15.06.400.0	14.5	4.0	755.15.10.400.0	23.7	6.6	755.15.16.400.0	36.3	10.0
400	125	530	87	330	755.15.06.400.1	14.5	4.6	755.15.10.400.1	23.7	7.4	755.15.16.400.1	36.3	11.4
400	140	550	92	340	755.15.06.400.2	14.5	5.1	755.15.10.400.2	23.7	8.3	755.15.16.400.2	36.3	12.7
400	160	580	98	340	755.15.06.400.3	14.5	5.8	755.15.10.400.3	23.7	9.5	755.15.16.400.3	36.3	14.6
400	180	590	105	360	755.15.06.400.4	14.5	6.6	755.15.10.400.4	23.7	10.7	755.15.16.400.4	36.3	16.4
400	200	610	112	375	755.15.06.400.5	14.5	7.3	755.15.10.400.5	23.7	11.9	755.15.16.400.5	36.3	18.2
400	225	630	120	380	755.15.06.400.6	14.5	8.2	755.15.10.400.6	23.7	13.4	755.15.16.400.6	36.3	20.5
400	250	655	129	360	755.15.06.400.7	14.5	9.1	755.15.10.400.7	23.7	14.8	755.15.16.400.7	36.3	22.7
400	280	685	139	380	755.15.06.400.8	14.5	10.2	755.15.10.400.8	23.7	16.6	755.15.16.400.8	36.3	25.4
400	315	720	150	400	755.15.06.400.9	14.5	11.4	755.15.10.400.9	23.7	18.7	755.15.16.400.9	36.3	28.6
400	355	780	164	400	755.15.06.400.10	14.5	12.9	755.15.10.400.10	23.7	21.1	755.15.16.400.10	36.3	32.2
450	110	515	82	375	755.15.06.450.0	16.3	4.0	755.15.10.450.0	26.7	6.6	755.15.16.450.0	40.9	10.0
450	125	530	87	375	755.15.06.450.1	16.3	4.6	755.15.10.450.1	26.7	7.4	755.15.16.450.1	40.9	11.4



7.6.18 PE 100 Inegal T



ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

da 1 mm	da 2 mm	L mm	i mm	z mm	SDR 27,6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
					Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
450	140	545	92	375	755.15.06.450.2	16.3	5.1	755.15.10.450.2	26.7	8.3	755.15.16.450.2	40.9	12.7
450	160	565	98	375	755.15.06.450.1	16.3	5.8	755.15.10.450.1	26.7	9.5	755.15.16.450.1	40.9	14.6
450	180	580	105	405	755.15.06.450.2	16.3	6.6	755.15.10.450.2	26.7	10.7	755.15.16.450.2	40.9	16.4
450	200	605	112	400	755.15.06.450.3	16.3	7.3	755.15.10.450.3	26.7	11.9	755.15.16.450.3	40.9	18.2
450	225	630	120	405	755.15.06.450.4	16.3	8.2	755.15.10.450.4	26.7	13.4	755.15.16.450.4	40.9	20.5
450	250	655	129	425	755.15.06.450.5	16.3	9.1	755.15.10.450.5	26.7	14.8	755.15.16.450.5	40.9	22.7
450	280	685	139	450	755.15.06.450.6	16.3	10.2	755.15.10.450.6	26.7	16.6	755.15.16.450.6	40.9	25.4
450	315	720	150	450	755.15.06.450.7	16.3	11.4	755.15.10.450.7	26.7	18.7	755.15.16.450.7	40.9	28.6
450	355	760	164	425	755.15.06.450.8	16.3	12.9	755.15.10.450.8	26.7	21.1	755.15.16.450.8	40.9	32.2
450	400	805	179	400	755.15.06.450.9	16.3	14.5	755.15.10.450.9	26.7	23.7	755.15.16.450.9	40.9	36.3
500	110	555	82	400	755.15.06.500.0	18.1	4.0	755.15.10.500.0	29.7	6.6	755.15.16.500.0	45.4	10.0
500	125	570	87	400	755.15.06.500.1	18.1	4.6	755.15.10.500.1	29.7	7.4	755.15.16.500.1	45.4	11.4
500	140	585	92	400	755.15.06.500.2	18.1	5.1	755.15.10.500.2	29.7	8.3	755.15.16.500.2	45.4	12.7
500	160	605	98	400	755.15.06.500.3	18.1	5.8	755.15.10.500.3	29.7	9.5	755.15.16.500.3	45.4	14.6
500	180	625	105	430	755.15.06.500.5	18.1	6.6	755.15.10.500.5	29.7	10.7	755.15.16.500.5	45.4	16.4
500	200	645	112	425	755.15.06.500.6	18.1	7.3	755.15.10.500.6	29.7	11.9	755.15.16.500.6	45.4	18.2
500	225	670	120	430	755.15.06.500.7	18.1	8.2	755.15.10.500.7	29.7	13.4	755.15.16.500.7	45.4	20.5
500	250	695	129	450	755.15.06.500.8	18.1	9.1	755.15.10.500.8	29.7	14.8	755.15.16.500.8	45.4	22.7
500	280	725	139	450	755.15.06.500.9	18.1	10.2	755.15.10.500.9	29.7	16.6	755.15.16.500.9	45.4	25.4
500	315	760	150	475	755.15.06.500.10	18.1	11.4	755.15.10.500.10	29.7	18.7	755.15.16.500.10	45.4	28.6
500	355	800	164	475	755.15.06.500.11	18.1	12.9	755.15.10.500.11	29.7	21.1	755.15.16.500.11	45.4	32.2
500	400	845	179	450	755.15.06.500.12	18.1	14.5	755.15.10.500.12	29.7	23.7	755.15.16.500.12	45.4	36.3
500	450	895	195	600	755.15.06.500.13	18.1	16.3	755.15.10.500.13	29.7	26.7	755.15.16.500.13	45.4	40.9
560	110	590	82	430	755.15.06.560.00	20.3	4.0	755.15.10.560.00	33.2	6.6	755.15.16.560.00	50.8	10.0
560	125	610	87	430	755.15.06.560.01	20.3	4.6	755.15.10.560.01	33.2	7.4	755.15.16.560.01	50.8	11.4
560	140	625	92	430	755.15.06.560.02	20.3	5.1	755.15.10.560.02	33.2	8.3	755.15.16.560.02	50.8	12.7
560	160	640	98	430	755.15.06.560.03	20.3	5.8	755.15.10.560.03	33.2	9.5	755.15.16.560.03	50.8	14.6
560	180	660	105	460	755.15.06.560.04	20.3	6.6	755.15.10.560.04	33.2	10.7	755.15.16.560.04	50.8	16.4
560	200	680	112	455	755.15.06.560.05	20.3	7.3	755.15.10.560.05	33.2	11.9	755.15.16.560.05	50.8	18.2
560	225	705	120	460	755.15.06.560.06	20.3	8.2	755.15.10.560.06	33.2	13.4	755.15.16.560.06	50.8	20.5
560	250	730	129	480	755.15.06.560.07	20.3	9.1	755.15.10.560.07	33.2	14.8	755.15.16.560.07	50.8	22.7
560	280	755	139	480	755.15.06.560.08	20.3	10.2	755.15.10.560.08	33.2	16.6	755.15.16.560.08	50.8	25.4
560	315	790	150	505	755.15.06.560.09	20.3	11.4	755.15.10.560.09	33.2	18.7	755.15.16.560.09	50.8	28.6
560	355	825	164	505	755.15.06.560.10	20.3	12.9	755.15.10.560.10	33.2	21.1	755.15.16.560.10	50.8	32.2
560	400	875	179	480	755.15.06.560.11	20.3	14.5	755.15.10.560.11	33.2	23.7	755.15.16.560.11	50.8	36.6
560	450	915	195	630	755.15.06.560.12	20.3	16.3	755.15.10.560.12	33.2	26.7	755.15.16.560.12	50.8	40.9
560	500	980	212	680	755.15.06.560.13	20.3	18.1	755.15.10.560.13	33.2	29.7	755.15.16.560.13	50.8	45.4


7.6.18 PE 100 Inegal T



ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

da 1 mm	da 2 mm	L mm	l mm	z mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
					Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
630	110	680	82	465	755.15.06.630.0	22.8	4.0	755.15.10.630.0	37.4	6.6	755.15.16.630.0	57.2	10.0
630	125	695	87	465	755.15.06.630.1	22.8	4.6	755.15.10.630.1	37.4	7.4	755.15.16.630.1	57.2	11.4
630	140	705	92	465	755.15.06.630.2	22.8	5.1	755.15.10.630.2	37.4	8.3	755.15.16.630.2	57.2	12.7
630	160	720	98	465	755.15.06.630.3	22.8	5.8	755.15.10.630.3	37.4	9.5	755.15.16.630.3	57.2	14.6
630	180	740	105	495	755.15.06.630.4	22.8	6.6	755.15.10.630.4	37.4	10.7	755.15.16.630.4	57.2	16.4
630	200	760	112	490	755.15.06.630.5	22.8	7.3	755.15.10.630.5	37.4	11.9	755.15.16.630.5	57.2	18.2
630	225	785	120	495	755.15.06.630.6	22.8	8.2	755.15.10.630.6	37.4	13.4	755.15.16.630.6	57.2	20.5
630	250	810	129	515	755.15.06.630.7	22.8	9.1	755.15.10.630.7	37.4	14.8	755.15.16.630.7	57.2	22.7
630	280	840	139	515	755.15.06.630.8	22.8	10.2	755.15.10.630.8	37.4	16.6	755.15.16.630.8	57.2	25.4
630	315	875	150	540	755.15.06.630.9	22.8	11.4	755.15.10.630.9	37.4	18.7	755.15.16.630.9	57.2	28.6
630	355	915	164	545	755.15.06.630.10	22.8	12.9	755.15.10.630.10	37.4	21.1	755.15.16.630.10	57.2	32.2
630	400	960	179	515	755.15.06.630.11	22.8	14.5	755.15.10.630.11	37.4	23.7	755.15.16.630.11	57.2	36.3
630	450	1010	195	665	755.15.06.630.12	22.8	16.3	755.15.10.630.12	37.4	26.7	755.15.16.630.12	57.2	40.9
630	500	1060	212	715	755.15.06.630.13	22.8	18.1	755.15.10.630.13	37.4	29.7	755.15.16.630.13	57.2	45.4
630	560	1120	235	715	755.15.06.630.14	22.8	20.3	755.15.10.630.14	37.4	33.2	755.15.16.630.14	57.2	50.8
710	110	740	82	505	755.15.06.710.00	25.7	4.0	755.15.10.710.00	42.1	6.6	755.15.16.710.00	64.5	10.0
710	125	755	87	505	755.15.06.710.01	25.7	4.6	755.15.10.710.01	42.1	7.4	755.15.16.710.01	64.5	11.4
710	140	700	92	505	755.15.06.710.02	25.7	5.1	755.15.10.710.02	42.1	8.3	755.15.16.710.02	64.5	12.7
710	160	790	98	505	755.15.06.710.03	25.7	5.8	755.15.10.710.03	42.1	9.5	755.15.16.710.03	64.5	14.6
710	180	810	105	535	755.15.06.710.04	25.7	6.6	755.15.10.710.04	42.1	10.7	755.15.16.710.04	64.5	16.4
710	200	820	112	530	755.15.06.710.05	25.7	7.3	755.15.10.710.05	42.1	11.9	755.15.16.710.05	64.5	18.2
710	225	845	120	535	755.15.06.710.06	25.7	8.2	755.15.10.710.06	42.1	13.4	755.15.16.710.06	64.5	20.5
710	250	870	129	555	755.15.06.710.07	25.7	9.1	755.15.10.710.07	42.1	14.8	755.15.16.710.07	64.5	22.7
710	280	900	139	555	755.15.06.710.08	25.7	10.2	755.15.10.710.08	42.1	16.6	755.15.16.710.08	64.5	25.4
710	315	935	150	580	755.15.06.710.09	25.7	11.4	755.15.10.710.09	42.1	18.7	755.15.16.710.09	64.5	28.6
710	355	975	164	580	755.15.06.710.10	25.7	12.9	755.15.10.710.10	42.1	21.1	755.15.16.710.10	64.5	32.2
710	400	1020	179	655	755.15.06.710.11	25.7	14.5	755.15.10.710.11	42.1	23.7	755.15.16.710.11	64.5	36.3
710	450	1070	195	705	755.15.06.710.12	25.7	16.3	755.15.10.710.12	42.1	26.7	755.15.16.710.12	64.5	40.9
710	500	1120	212	730	755.15.06.710.13	25.7	18.1	755.15.10.710.13	42.1	29.7	755.15.16.710.13	64.5	45.4
710	560	1180	235	755	755.15.06.710.14	25.7	20.3	755.15.10.710.14	42.1	33.2	755.15.16.710.14	64.5	50.8
710	630	1250	255	805	755.15.06.710.15	25.7	22.8	755.15.10.710.15	42.1	37.4	755.15.16.710.15	64.5	57.2
800	110	770	82	575	755.15.06.800.00	29.0	4.0	755.15.10.800.00	47.4	6.6	755.15.16.800.0		10.0
800	125	795	87	575	755.15.06.800.01	29.0	4.6	755.15.10.800.01	47.4	7.4	755.15.16.800.1		11.4
800	140	800	92	575	755.15.06.800.02	29.0	5.1	755.15.10.800.02	47.4	8.3	755.15.16.800.2		12.7
800	160	820	98	575	755.15.06.800.03	29.0	5.8	755.15.10.800.03	47.4	9.5	755.15.16.800.3		14.6
800	180	840	105	600	755.15.06.800.04	29.0	6.6	755.15.10.800.04	47.4	10.7	755.15.16.800.4		16.4
800	200	860	112	600	755.15.06.800.05	29.0	7.3	755.15.10.800.05	47.4	11.9	755.15.16.800.5		18.2


7.6.18 PE 100 Inegal T



ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

da 1 mm	da 2 mm	L mm	i mm	z mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
					Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
800	225	885	120	620	755.15.06.800.06	29.0	8.2	755.15.10.800.06	47.4	13.4	755.15.16.800.6	20.5	
800	250	910	129	625	755.15.06.800.07	29.0	9.1	755.15.10.800.07	47.4	14.8	755.15.16.800.7	22.7	
800	280	940	139	625	755.15.06.800.08	29.0	10.2	755.15.10.800.08	47.4	16.6	755.15.16.800.8	25.4	
800	315	975	150	650	755.15.06.800.09	29.0	11.4	755.15.10.800.09	47.4	18.7	755.15.16.800.9	28.6	
800	355	1015	164	650	755.15.06.800.10	29.0	12.9	755.15.10.800.10	47.4	21.1	755.15.16.800.10	32.2	
800	400	1060	179	650	755.15.06.800.11	29.0	14.5	755.15.10.800.11	47.4	23.7	755.15.16.800.11	36.3	
800	450	1110	195	800	755.15.06.800.12	29.0	16.3	755.15.10.800.12	47.4	26.7	755.15.16.800.12	40.9	
800	500	1160	212	900	755.15.06.800.13	29.0	18.1	755.15.10.800.13	47.4	29.7	755.15.16.800.13	45.4	
800	560	1220	235	900	755.15.06.800.14	29.0	20.3	755.15.10.800.14	47.4	33.2	755.15.16.800.14	50.8	
800	630	1290	255	1000	755.15.06.800.15	29.0	22.8	755.15.10.800.15	47.4	37.4	755.15.16.800.15	57.2	
800	710	1370	280		755.15.06.800.16	29.0	25.7	755.15.10.800.16	47.4	42.1	755.15.16.800.16	64.5	
900	110	710	82	625	755.15.06.900.00	32.7	4.0	755.15.10.900.00	53.3	6.6	755.15.16.900.00	10.0	
900	125	725	87	625	755.15.06.900.01	32.7	4.6	755.15.10.900.01	53.3	7.4	755.15.16.900.01	11.4	
900	140	740	92	625	755.15.06.900.02	32.7	5.1	755.15.10.900.02	53.3	8.3	755.15.16.900.02	12.7	
900	160	760	98	625	755.15.06.900.03	32.7	5.8	755.15.10.900.03	53.3	9.5	755.15.16.900.03	14.6	
900	180	780	105	650	755.15.06.900.04	32.7	6.6	755.15.10.900.04	53.3	10.7	755.15.16.900.04	16.4	
900	200	800	112	650	755.15.06.900.05	32.7	7.3	755.15.10.900.05	53.3	11.9	755.15.16.900.05	18.2	
900	225	825	120	670	755.15.06.900.06	32.7	8.2	755.15.10.900.06	53.3	13.4	755.15.16.900.06	20.5	
900	250	850	129	675	755.15.06.900.07	32.7	9.1	755.15.10.900.07	53.3	14.8	755.15.16.900.07	22.7	
900	280	880	139	675	755.15.06.900.08	32.7	10.2	755.15.10.900.08	53.3	16.6	755.15.16.900.08	25.4	
900	315	915	150	700	755.15.06.900.09	32.7	11.4	755.15.10.900.09	53.3	18.7	755.15.16.900.09	28.6	
900	355	955	164	700	755.15.06.900.10	32.7	12.9	755.15.10.900.10	53.3	21.1	755.15.16.900.10	32.2	
900	400	1000	179	700	755.15.06.900.11	32.7	14.5	755.15.10.900.11	53.3	23.7	755.15.16.900.11	36.3	
900	450	1050	195	850	755.15.06.900.12	32.7	16.3	755.15.10.900.12	53.3	26.7	755.15.16.900.12	40.9	
900	500	1100	212	950	755.15.06.900.13	32.7	18.1	755.15.10.900.13	53.3	29.7	755.15.16.900.13	45.4	
900	560	1160	235	950	755.15.06.900.14	32.7	20.3	755.15.10.900.14	53.3	33.2	755.15.16.900.14	50.8	
900	630	1230	255	1050	755.15.06.900.15	32.7	22.8	755.15.10.900.15	53.3	37.4	755.15.16.900.15	57.2	
900	710	1310	280	1050	755.15.06.900.16	32.7	25.7	755.15.10.900.16	53.3	42.1	755.15.16.900.16	64.5	
900	800	1400	300	1100	755.15.06.900.17	32.7	29.0	755.15.10.900.17	53.3	47.4	755.15.16.900.17		
1000	110	820	82	675	755.15.06.1000.00	36.3	4.0	755.15.10.1000.00	59.3	6.6	755.15.16.1000.00	10.0	
1000	125	835	87	675	755.15.06.1000.01	36.3	4.6	755.15.10.1000.01	59.3	7.4	755.15.16.1000.01	11.4	
1000	140	850	92	675	755.15.06.1000.02	36.3	5.1	755.15.10.1000.02	59.3	8.3	755.15.16.1000.02	12.7	
1000	160	870	98	675	755.15.06.1000.03	36.3	5.8	755.15.10.1000.03	59.3	9.5	755.15.16.1000.03	14.6	
1000	180	890	105	700	755.15.06.1000.04	36.3	6.6	755.15.10.1000.04	59.3	10.7	755.15.16.1000.04	16.4	
1000	200	910	112	700	755.15.06.1000.05	36.3	7.3	755.15.10.1000.05	59.3	11.9	755.15.16.1000.05	18.2	
1000	225	935	129	720	755.15.06.1000.06	36.3	8.2	755.15.10.1000.06	59.3	13.4	755.15.16.1000.06	20.5	
1000	250	960	129	725	755.15.06.1000.07	36.3	9.1	755.15.10.1000.07	59.3	14.8	755.15.16.1000.07	22.7	


7.6.18 PE 100 Inegal T



ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

da 1 mm	da 2 mm	L mm	i mm	z mm	SDR 27.6 - PN 6			SDR 17 - PN 10		
					Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
1000	280	990	139	725	755.15.06.1000.08	36.3	10.2	755.15.10.1000.08	59.3	16.6
1000	315	1025	150	750	755.15.06.1000.09	36.3	11.4	755.15.10.1000.09	59.3	18.7
1000	355	1075	164	750	755.15.06.1000.10	36.3	12.9	755.15.10.1000.10	59.3	21.1
1000	400	1110	179	900	755.15.06.1000.11	36.3	14.5	755.15.10.1000.11	59.3	23.7
1000	450	1160	195	1000	755.15.06.1000.12	36.3	16.3	755.15.10.1000.12	59.3	26.7
1000	500	1210	212	1000	755.15.06.1000.13	36.3	18.1	755.15.10.1000.13	59.3	29.7
1000	560	1270	235	1100	755.15.06.1000.14	36.3	20.3	755.15.10.1000.14	59.3	33.2
1000	630	1340	255	1100	755.15.06.1000.15	36.3	22.8	755.15.10.1000.15	59.3	37.4
1000	710	1420	280	1100	755.15.06.1000.16	36.3	25.7	755.15.10.1000.16	59.3	42.1
1000	800	1510	300	1150	755.15.06.1000.17	36.3	29.00	755.15.10.1000.17	59.3	47.4
1200	110	830	110	775	755.15.06.1200.00	43.5				
1200	125	845	125	775	755.15.06.1200.01	43.5				
1200	140	860	140	775	755.15.06.1200.02	43.5				
1200	160	880	160	775	755.15.06.1200.03	43.5				
1200	180	900	180	800	755.15.06.1200.04	43.5				
1200	200	920	200	800	755.15.06.1200.05	43.5				
1200	225	945	225	820	755.15.06.1200.06	43.5				
1200	250	970	250	825	755.15.06.1200.07	43.5				
1200	280	1000	280	825	755.15.06.1200.08	43.5				
1200	315	1035	315	850	755.15.06.1200.09	43.5				
1200	355	1075	355	850	755.15.06.1200.10	43.5				
1200	400	1120	400	850	755.15.06.1200.11	43.5				

7.6.19 PE 100 45° Çatal (Konfeksiyon)




ISO 4427-3
TS418-3 EN 12201-3
DIN 16963

Tablo 7.24 PE 100 45° Çatal (Konfeksiyon) Ölçü Tablosu

da mm	L mm	i mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
90	450	300	300	755.10.06.090.0	3.3	755.10.10.090.0	5.4	755.10.16.090.0	8.2
110	520	340	340	755.10.06.110.0	4.0	755.10.10.110.0	6.6	755.10.16.110.0	10.0
125	520	340	340	755.10.06.125.0	4.6	755.10.10.125.0	7.4	755.10.16.125.0	11.4
140	570	380	380	755.10.06.140.0	5.1	755.10.10.140.0	8.3	755.10.16.140.0	12.7
160	640	450	450	755.10.06.160.0	5.8	755.10.10.160.0	9.5	755.10.16.160.0	14.6
180	640	450	450	755.10.06.180.0	6.6	755.10.10.180.0	10.7	755.10.16.180.0	16.4
200	800	530	530	755.10.06.200.0	7.3	755.10.10.200.0	11.9	755.10.16.200.0	18.2
225	800	530	530	755.10.06.225.0	8.2	755.10.10.225.0	13.4	755.10.16.225.0	20.5
250	1000	660	660	755.10.06.250.0	9.1	755.10.10.250.0	14.8	755.10.16.250.0	22.7
280	1000	660	660	755.10.06.280.0	10.2	755.10.10.280.0	16.6	755.10.16.280.0	25.4
315	1300	840	840	755.10.06.315.0	11.4	755.10.10.315.0	18.7	755.10.16.315.0	28.6


7.6.20 PE 100 60° Çatal (Konfeksiyon)



Tablo 7.25 PE 100 60° Çatal (Konfeksiyon) Ölçü Tablosu

da mm	L mm	i mm	z mm	SDR 27.6 - PN 6		SDR 17 - PN 10		SDR 11 - PN 16	
				Kodu	S mm.	Kodu	S mm.	Kodu	S mm.
90	450	300	300	755.11.06.090.0	3.3	755.11.10.090.0	5.4	755.11.16.090.0	8.2
110	500	325	325	755.11.06.110.0	4.0	755.11.10.110.0	6.6	755.11.16.110.0	10.0
125	545	355	355	755.11.06.125.0	4.6	755.11.10.125.0	7.4	755.11.16.125.0	11.4
140	581	375	375	755.11.06.140.0	5.1	755.11.10.140.0	8.3	755.11.16.140.0	12.7
160	642	412	412	755.11.06.160.0	5.8	755.11.10.160.0	9.5	755.11.16.160.0	14.6
180	700	450	450	755.11.06.180.0	6.6	755.11.10.180.0	10.7	755.11.16.180.0	16.4
200	759	487	487	755.11.06.200.0	7.3	755.11.10.200.0	11.9	755.11.16.200.0	18.2
225	830	530	530	755.11.06.225.0	8.2	755.11.10.225.0	13.4	755.11.16.225.0	20.5
250	905	580	580	755.11.06.250.0	9.1	755.11.10.250.0	14.8	755.11.16.250.0	22.7
280	995	630	630	755.11.06.280.0	10.2	755.11.10.280.0	16.6	755.11.16.280.0	25.4
315	1090	690	690	755.11.06.315.0	11.4	755.11.10.315.0	18.7	755.11.16.315.0	28.6

7.6.21 PE 100 Redüksiyon

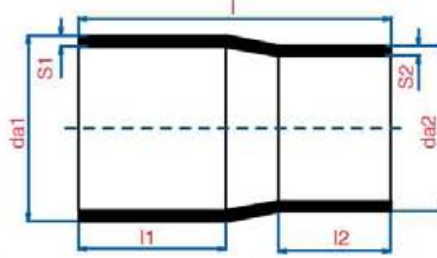



ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

Tablo 7.26 PE 100 Redüksiyon Ölçü Tablosu

da 1 / da 2 mm	L mm	L1 mm	L2 mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
				Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
32-20	120	50	52								3.0	3.0
32-25	130	57	52								3.0	3.0
40-20	109	49	41								3.0	3.0
40-25	109	49	41								3.7	3.0
40-32	109	49	41								3.7	3.0
50-20	130	60	54								3.7	3.0
50-25	130	60	54								4.6	3.0
50-32	130	60	54								4.6	3.0
50-40	130	60	54				755.18.10.050.2	3.0	3.0		4.6	3.7
63-20	133	64	50				755.18.10.063.0	3.8	3.0		5.8	3.0
63-25	133	64	50				755.18.10.063.1	3.8	3.0		5.8	3.7
63-32	133	64	50				755.18.10.063.2	3.8	3.0		5.8	4.6
63-40	135	63	53				755.18.10.075.0	4.5	3.0		6.8	3.0
63-50	106	47	45				755.18.10.075.1	4.5	3.0		6.8	3.7
75-63	166	95	62				755.18.10.075.2	4.5	3.0	755.18.16.075.2	6.8	4.6
90-63	65	81	62				755.18.10.075.3	4.5	3.8	755.18.16.075.3	6.8	5.8
90-75	185	100	76				755.18.10.090.0	5.4	3.0	755.18.16.090.0	8.2	4.6
110-63	99	91	65				755.18.10.090.1	5.4	3.8	755.18.16.090.1	8.2	5.8
110-75	183	86	76				755.18.10.090.2	5.4	4.5	755.18.16.090.2	8.2	6.8
110-90	205	95	79				755.18.10.110.0	6.6	3.0	755.18.16.110.0	10.0	4.6
125-63	187	87	61	755.18.06.110.1	4.0	3.0	755.18.10.110.1	6.6	3.8	755.18.16.110.1	10.0	5.8
125-75	198	97	70	755.18.06.110.2	4.0	3.0	755.18.10.110.2	6.6	4.5	755.18.16.110.2	10.0	6.8
125-90	205	101	79	755.18.06.110.3	4.0	3.3	755.18.10.110.3	6.6	5.4	755.18.16.110.3	10.0	8.2
125-110	207	102	93	755.18.06.125.0	4.6	3.0	755.18.10.125.0	7.4	3.8	755.18.16.125.0	11.4	5.8
140-90	224	113	80	755.18.06.125.1	4.6	3.0	755.18.10.125.1	7.4	4.5	755.18.16.125.1	11.4	6.8
140-110	222	111	90	755.18.06.125.2	4.6	3.3	755.18.10.125.2	7.4	5.4	755.18.16.125.2	11.4	8.2
140-125	223	110	104	755.18.06.125.3	4.6	4.0	755.18.10.125.3	7.4	6.6	755.18.16.125.3	11.4	10.0
160-90	231	110	80	755.18.06.140.0	5.1	3.0	755.18.10.140.0	8.3	4.5	755.18.16.140.0	12.7	6.8
160-110	229	108	92	755.18.06.140.1	5.1	3.3	755.18.10.140.1	8.3	5.4	755.18.16.140.1	12.7	8.2
160-125	232	108	102	755.18.06.140.2	5.1	4.0	755.18.10.140.2	8.3	6.6	755.18.16.140.2	12.7	10.0

NOT: Standart min. boy uzunluğu vermektedir. Üretim boyları tablodaki şekildedir.

7.6.21 PE 100 Redüksiyon

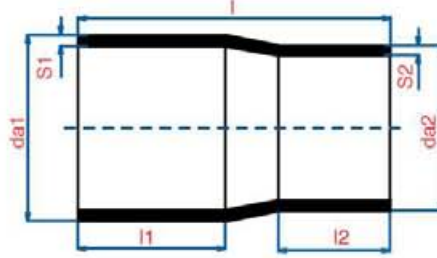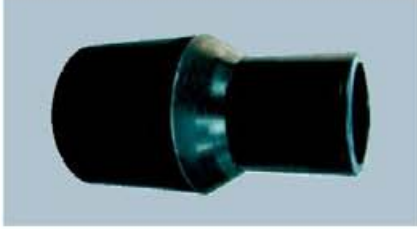


ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

da 1 / da 2 mm	L mm	L1 mm	L2 mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
				Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
160-140	236	108	110	755.18.06.160.2	5.8	4.6	755.18.10.160.2	9.5	7.4	755.18.16.160.2	14.6	11.4
180-110	298	136	108	755.18.06.160.3	5.8	5.1	755.18.10.160.3	9.5	8.3	755.18.16.160.3	14.6	12.7
180-125	299	140	106	755.18.06.180.0	6.6	3.3	755.18.10.180.0	10.7	5.4	755.18.16.180.0	16.4	8.2
180-140	300	139	108	755.18.06.180.1	6.6	4.0	755.18.10.180.1	10.7	6.6	755.18.16.180.1	16.4	10.0
180-160	293	137	101	755.18.06.180.2	6.6	4.6	755.18.10.180.2	10.7	7.4	755.18.16.180.2	16.4	11.4
200-90	318	161	107	755.18.06.180.3	6.6	5.1	755.18.10.180.3	10.7	8.3	755.18.16.180.3	16.4	12.7
200-110	296	124	110	755.18.06.180.4	6.6	5.8	755.18.10.180.4	10.7	9.5	755.18.16.180.4	16.4	14.6
200-125	296	124	110	755.18.06.200.0	7.3	5.1	755.18.10.200.0	11.9	8.3	755.18.16.200.0	18.2	12.7
200-140	310	162	113	755.18.06.200.1	7.3	5.8	755.18.10.200.1	11.9	9.5	755.18.16.200.1	18.2	14.6
200-160	310	162	113	755.18.06.200.2	7.3	6.6	755.18.10.200.2	11.9	10.7	755.18.16.200.2	18.2	16.4
200-180	310	162	118	755.18.06.225.0	8.2	5.1	755.18.10.225.0	13.4	8.3	755.18.16.225.0	20.5	12.7
225-90	305	144	102	755.18.06.225.1	8.2	5.8	755.18.10.225.1	13.4	9.5	755.18.16.225.1	20.5	14.6
225-110	317	144	114	755.18.06.225.2	8.2	6.6	755.18.10.225.2	13.4	10.7	755.18.16.225.2	20.5	16.4
225-125	317	144	114	755.18.06.225.3	8.2	7.3	755.18.10.225.3	13.4	11.9	755.18.16.225.3	20.5	18.2
225-140	300	143	99	755.18.06.250.0	9.1	5.8	755.18.10.250.0	14.8	9.5	755.18.16.250.0	22.7	14.6
225-160	314	143	116	755.18.06.250.1	9.1	6.6	755.18.10.250.1	14.8	10.7	755.18.16.250.1	22.7	16.4
225-180	311	145	117	755.18.06.250.2	9.1	7.3	755.18.10.250.2	14.8	11.9	755.18.16.250.2	22.7	18.2
225-200	316	142	152	755.18.06.250.3	9.1	8.2	755.18.10.250.3	14.8	13.4	755.18.16.250.3	22.7	20.5
250-125	292	117	94	755.18.06.280.0	10.2	6.6	755.18.10.280.0	16.6	10.7	755.18.16.280.0	25.4	16.4
250-140	243	187	90	755.18.06.280.1	10.2	7.3	755.18.10.280.1	16.6	11.9	755.18.16.280.1	25.4	18.2
250-160	386	208	116	755.18.06.280.2	10.2	8.2	755.18.10.280.2	16.6	13.4	755.18.16.280.2	25.4	20.5
250-180	295	230	105	755.18.06.280.3	10.2	9.1	755.18.10.280.3	16.6	14.8			
250-200	391	187	180	755.18.06.315.0	11.4	7.3	755.18.10.315.0	18.7	11.9			
250-225	397	177	179	755.18.06.315.1	11.4	8.2	755.18.10.315.1	18.7	13.4			
280-140	343	170	90	755.18.06.315.2	11.4	9.1	755.18.10.315.2	18.7	14.8			
280-160	391	180	100	755.18.06.315.3	11.4	10.2	755.18.10.315.3	18.7	16.6	755.18.16.315.3	28.6	25.4
280-180	397	180	113	755.18.06.355.0	12.9	8.2	755.18.10.355.0	21.1	13.4	755.18.16.355.0	32.2	20.5
280-200	358	170	120	755.18.06.355.1	12.9	9.1	755.18.10.355.1	21.1	14.8	755.18.16.355.1	32.2	22.7
280-225	343	170	133	755.18.06.355.2	12.9	10.2	755.18.10.355.2	21.1	16.6	755.18.16.355.2	32.2	25.4
280-250	348	186	158	755.18.06.355.3	12.9	11.4	755.18.10.355.3	21.1	18.7	755.18.16.355.3	32.2	28.6

NOT: Standart min. boy uzunluğu vermektedir. Üretim boyları tablodaki şekildedir.

7.6.21 PE 100 Redüksiyon

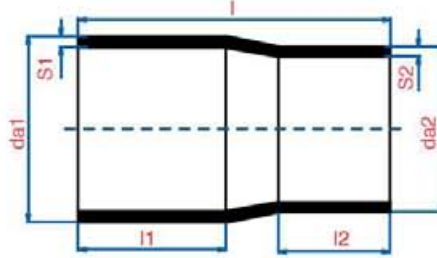


ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

da 1 / da 2 mm	L mm	L1 mm	L2 mm	SDR 27.6 - PN 6			SDR 17 - PN 10			SDR 11 - PN 16		
				Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm	Kodu	S1 mm	S2 mm
315-160	359	180	113	755.18.06.400.3	14.5	11.4	755.18.10.400.3	23.7	18.7	755.18.16.400.3	36.3	28.6
315-180	358	170	120	755.18.06.400.4	14.5	12.9	755.18.10.400.4	23.7	21.1	755.18.16.400.4	36.3	32.2
315-200	380	180	135	755.18.06.450.0	16.3	10.2	755.18.10.450.0	26.7	16.6			
315-225	363	170	133	755.18.06.450.1	16.3	11.4	755.18.10.450.1	26.7	18.7	755.18.16.450.1	40.9	28.6
315-250	385	186	158	755.18.06.450.2	16.3	12.9	755.18.10.450.2	26.7	21.1	755.18.16.450.2	40.9	32.2
315-280	384	194	161	755.18.06.450.3	16.3	14.5	755.18.10.450.3	26.7	23.7			
355-225	365	178	133	755.18.06.500.0	18.1	11.4	755.18.10.500.0	29.7	18.7			
355-250	390	178	130	755.18.06.500.1	18.1	12.9	755.18.10.500.1	29.7	21.1			
355-280	378	180	133	755.18.06.500.2	18.1	14.5	755.18.10.500.2	29.7	23.7	755.18.16.500.2	45.4	36.3
355-315	406	187	189	755.18.06.500.3	18.1	16.3	755.18.10.500.3	29.7	26.7			
400-225	375	180	130	755.18.06.560.0	20.3	12.9	755.18.10.560.0	33.2	21.1	755.18.16.560.0	50.8	32.2
400-250	380	180	135	755.18.06.560.1	20.3	14.5	755.18.10.560.1	33.2	23.7	755.18.16.560.1	50.8	36.3
400-280	375	168	125	755.18.06.560.2	20.3	16.3	755.18.10.560.2	33.2	26.7	755.18.16.560.2	50.8	40.9
400-315	368	175	159	755.18.06.560.3	20.3	18.1	755.18.10.560.3	33.2	29.7	755.18.16.560.3	50.8	45.4
400-355	384	194	161	755.18.06.630.0	22.8	14.5	755.18.10.630.0	37.4	23.7	755.18.16.630.0	57.2	36.3
450-280	365	178	133	755.18.06.630.1	22.8	16.3	755.18.10.630.1	37.4	26.7	755.18.16.630.1	57.2	40.9
450-315	390	178	130	755.18.06.630.2	22.8	18.1	755.18.10.630.2	37.4	29.7	755.18.16.630.2	57.2	45.4
450-355	390	178	130	755.18.06.630.3	22.8	20.3	755.18.10.630.3	37.4	33.2	755.18.16.630.3	57.2	50.8
450-400	406	187	189	755.18.06.710.0	25.7	18.1	755.18.10.710.0	42.1	29.7	755.18.16.710.0	64.5	45.4
500-450	400	200	150	755.18.06.710.1	25.7	20.3	755.18.10.710.1	42.1	33.2	755.18.16.710.1	64.5	50.8
580-355	400	200	150	755.18.06.710.2	25.7	22.8	755.18.10.710.2	42.1	37.4	755.18.16.710.2	64.5	57.2
560-400	391	200	145	755.18.06.800.0	29.0	20.3	755.18.10.800.0	47.4	33.2	755.18.16.800.0	72.8	50.8
560-450	391	200	146	755.18.06.800.1	29.0	22.8	755.18.10.800.1	47.4	37.4	755.18.16.800.1	72.8	57.2
560-500	420	180	165	755.18.06.800.2	29.0	25.7	755.18.10.800.2	47.4	42.1	755.18.16.800.2	72.8	64.5
630-450	450	200	150	755.18.06.900.0	32.6	22.8	755.18.10.900.0	53.3	37.4			
630-500	450	200	150	755.18.06.900.1	32.6	25.7	755.18.10.900.1	53.3	42.1			
630-580	450	200	150	755.18.06.900.2	32.6	29.0	755.18.10.900.2	53.3	47.4			
710-630	476	220	190	755.18.06.910.0	36.2	25.7	755.18.10.910.0	59.3	42.1			
800-710	600	300	200	755.18.06.910.1	36.2	29.0	755.18.10.910.1	59.3	47.4			
900-800	700	400	300	755.18.06.910.2	36.2	32.6	755.18.10.910.2	59.3	53.3			

NOT: Standart min. boy uzunluğu vermektedir. Üretim boyları tablodaki şekildedir.

7.6.22 PE 100 Flanş Adaptörü




ISO 4427-3
TS418-3 EN 12201-3
TS EN 1555-3

Tablo 7.27 PE 100 Flanş Adaptörü Ölçü Tablosu

da 1 mm	da 2 mm	SDR 27.6 - PN 6					SDR 17 - PN 10					SDR 11 - PN 16							
		Kodu	da 3	L mm	L1 mm	h mm	s mm	Kodu	da 3	L mm	L1 mm	h mm	s mm	Kodu	da 3	L mm	L1 mm	h mm	s mm
20	27												852.01.06.020.0	45	61	41	7	2.0	
25	33												852.01.06.025.0	58	63	41	9	2.3	
32	40						852.01.06.032.0	68	67	44	10	2.0	852.01.06.032.0	68	67	44	10	3.0	
40	50						852.01.06.040.0	78	75	49	11	2.4	852.01.06.040.0	78	75	49	11	3.7	
50	61	852.01.06.050.0	83	82	55	12	2.0	852.01.06.050.0	88	82	55	12	3.0	852.01.06.050.0	88	82	55	12	4.6
63	75	852.01.06.063.0	92	97	63	14	2.3	852.01.06.063.0	102	97	63	14	3.8	852.01.06.063.0	102	97	63	14	5.8
75	89	852.01.06.075.0	112	106	70	16	2.7	852.01.06.075.0	122	106	70	16	4.5	852.01.06.075.0	122	106	70	16	6.8
90	105	852.01.06.090.0	128	116	79	17	3.3	852.01.06.090.0	138	116	79	17	5.4	852.01.06.090.0	138	116	79	17	8.2
110	125	852.01.06.110.0	148	125	82	18	4.0	852.01.06.110.0	158	125	82	18	6.6	852.01.06.110.0	158	125	82	18	10.0
125	132	852.01.06.125.0	148	125	87	18	4.6	852.01.06.125.0	158	132	87	25	7.4	852.01.06.125.0	158	132	87	25	11.4
140	155	852.01.06.140.0	177	138	92	18	5.1	852.01.06.140.0	188	145	92	25	8.3	852.01.06.140.0	188	145	92	25	12.7
160	175	852.01.06.160.0	202	144	98	18	5.8	852.01.06.160.0	212	151	98	25	9.5	852.01.06.160.0	212	151	98	25	14.6
180	185	852.01.06.180.0	202	155	105	20	6.6	852.01.06.180.0	212	165	105	30	10.7	852.01.06.180.0	212	165	105	30	16.4
200	232	852.01.06.200.0	258	176	112	24	7.3	852.01.06.200.0	268	184	112	32	11.9	852.01.06.200.0	268	184	112	32	18.2
225	235	852.01.06.225.0	258	174	120	24	8.2	852.01.06.225.0	268	182	120	32	13.4	852.01.06.225.0	268	182	120	32	20.5
250	285	852.01.06.250.0	312	194	129	25	9.1	852.01.06.250.0	320	204	129	35	14.8	852.01.06.250.0	320	204	129	35	22.7
280	291	852.01.06.280.0	312	194	139	25	10.2	852.01.06.280.0	320	204	139	35	16.6	852.01.06.280.0	320	204	139	35	25.4
315	335	852.01.06.315.0	368	215	150	25	11.4	852.01.06.315.0	370	225	150	35	18.7	852.01.06.315.0	370	225	150	35	28.6
355	373	852.01.06.355.0	418	234	164	30	12.9	852.01.06.355.0	430	244	164	40	21.1	852.01.06.355.0	430	244	164	40	32.2
400	427	852.01.06.400.0	468	257	179	33	14.5	852.01.06.400.0	482	270	179	46	23.7	852.01.06.400.0	482	270	179	46	36.3
450	562	852.01.06.450.0	524	301	195	46	16.3	852.01.06.450.0	505	315	195	60	26.7	852.01.06.450.0	505	315	195	60	40.9
500	530	852.01.06.500.0	574	308	212	46	18.1	852.01.06.500.0	585	322	212	60	29.7	852.01.06.500.0	585	322	212	60	45.4
560	615	852.01.06.560.0	675	345	235	50	20.3	852.01.06.560.0	685	355	235	60	33.2	852.01.06.560.0	685	355	235	60	50.8
630	642	852.01.06.630.0	675	345	255	50	22.8	852.01.06.630.0	685	355	255	60	37.4	852.01.06.630.0	685	355	255	60	57.2
710	737	852.01.06.710.0	780	360	260	50	25.7	852.01.06.710.0	800	370	260	60	42.1	852.01.06.710.0	800	370	260	60	64.5
800	840	852.01.06.800.0	880	372	270	52	29.0	852.01.06.800.0	905	380	270	60	47.4	852.01.06.800.0	905	380	270	60	72.7
900	944	852.01.06.900.0	980	405	300	55	32.7	852.01.06.900.0	1005	410	300	60	53.3	852.01.06.900.0	1005	410	300	60	81.8
1000	1047	852.01.06.910.0	1080	430	300	60	36.3	852.01.06.910.0	1110	430	300	60	59.3	852.01.06.910.0	1110	430	300	60	90.9
1200	1245	852.01.06.920.0	1300	400	250	70	43.5	852.01.06.920.0	1330	400	230	80	70.6	852.01.06.920.0	1330	400	230	80	109.1
1400	1450	852.01.06.940.0	1510	400	260	80	50.8	852.01.06.940.0	1535	400	190	100	82.4	852.01.06.940.0					
1600	1652	852.01.06.960.0	1715	400	260	80	58.0	852.01.06.960.0	1730	400	190	100	91.1	852.01.06.960.0					

7.6.23 Çelik Flanş (Galvaniz Kaplı)




DIN 2501
TS ISO 7005-1

Tablo 7.28 PE 100 Çelik Flanş (Galvaniz Kaplı) Ölçü Tablosu

da mm	di mm	PN 6					PN 10					PN 16							
		Kodu	K mm	D mm	d mm	n mm	b mm	Kodu	K mm	D mm	d mm	n mm	b mm	Kodu	K mm	D mm	d mm	n mm	b mm
20	28	852.01.06.020.0	55	80	11	4	12	852.01.10.020.0	65	95	14	4	14	852.01.16.020.0	65	95	14	4	14
25	34	852.01.06.025.0	65	90	11	4	14	852.01.10.025.0	75	105	14	4	16	852.01.16.025.0	75	105	14	4	16
32	42	852.01.06.032.0	75	100	11	4	14	852.01.10.032.0	85	115	14	4	16	852.01.16.032.0	85	115	14	4	16
40	51	852.01.06.040.0	90	120	14	4	14	852.01.10.040.0	100	140	18	4	16	852.01.16.040.0	100	140	18	4	16
50	62	852.01.06.050.0	100	130	14	4	14	852.01.10.050.0	110	150	18	4	16	852.01.16.050.0	110	150	18	4	16
63	78	852.01.06.063.0	110	140	14	4	14	852.01.10.063.0	125	165	18	4	18	852.01.16.063.0	125	165	18	4	18
75	92	852.01.06.075.0	130	160	14	4	14	852.01.10.075.0	145	185	18	4	18	852.01.16.075.0	145	185	18	4	18
90	108	852.01.06.090.0	150	190	18	4	16	852.01.10.090.0	160	200	18	8	20	852.01.16.090.0	160	200	18	8	20
110	125	852.01.06.110.0	170	210	18	4	16	852.01.10.110.0	180	220	18	8	20	852.01.16.110.0	180	220	18	8	20
125	135	852.01.06.125.0	170	210	18	4	16	852.01.10.125.0	180	220	18	8	20	852.01.16.125.0	180	220	18	8	20
140	158	852.01.06.140.0	200	240	18	8	18	852.01.10.140.0	210	250	18	8	22	852.01.16.140.0	210	250	18	8	22
160	178	852.01.06.160.0	225	265	18	8	18	852.01.10.160.0	240	285	22	8	22	852.01.16.160.0	240	285	22	8	22
180	188	852.01.06.180.0	225	265	18	8	18	852.01.10.180.0	240	285	22	8	22	852.01.16.180.0	240	285	22	8	22
200	235	852.01.06.200.0	280	320	18	8	20	852.01.10.200.0	295	340	22	8	24	852.01.16.200.0	295	340	22	12	24
225	238	852.01.06.225.0	280	320	18	8	20	852.01.10.225.0	295	340	22	8	24	852.01.16.225.0	295	340	22	12	24
250	288	852.01.06.250.0	335	375	18	12	22	852.01.10.250.0	350	395	22	12	26	852.01.16.250.0	355	405	26	12	26
280	294	852.01.06.280.0	335	375	18	12	22	852.01.10.280.0	350	395	22	12	26	852.01.16.280.0	355	405	26	12	26
315	338	852.01.06.315.0	395	440	22	12	22	852.01.10.315.0	400	445	22	12	26	852.01.16.315.0	410	460	26	12	28
355	376	852.01.06.355.0	445	490	22	12	22	852.01.10.355.0	460	505	22	16	26	852.01.16.355.0	470	520	26	16	30
400	430	852.01.06.400.0	495	540	22	16	22	852.01.10.400.0	515	565	26	16	26	852.01.16.400.0	525	580	30	16	32
450	465	852.01.06.450.0	550	595	22	16	24	852.01.10.450.0	565	615	26	20	28	852.01.16.450.0	585	640	30	20	34
500	533	852.01.06.500.0	600	645	22	20	24	852.01.10.500.0	620	670	26	20	28	852.01.16.500.0	650	715	33	20	34
560	618	852.01.06.560.0	705	755	26	20	24	852.01.10.560.0	725	780	30	20	28	852.01.16.560.0	770	840	36	20	36
630	645	852.01.06.630.0	705	755	26	20	24	852.01.10.630.0	725	780	30	20	28	852.01.16.630.0	770	840	36	20	36
710	740	852.01.06.710.0	810	860	26	24	24	852.01.10.710.0	840	895	30	24	30	852.01.16.710.0	840	910	36	24	36
800	843	852.01.06.800.0	920	975	30	24	24	852.01.10.800.0	950	1015	33	24	32	852.01.16.800.0	950	1025	39	24	38
900	947	852.01.06.900.0	1020	1075	30	24	26	852.01.10.900.0	1050	1115	33	28	34	852.01.16.900.0	1050	1125	39	28	40
1000	1050	852.01.06.910.0	1120	1175	30	28	26	852.01.10.910.0	1160	1230	36	28	34	852.01.16.910.0	1170	1255	42	28	42
1200	1250	852.01.06.920.0	1340	1405	33	32	28	852.01.10.920.0	1380	1455	39	32	38	852.01.16.920.0	1390	1485	48	32	48
1400	1460	852.01.06.940.0	1560	1630	36	36	32	852.01.10.940.0	1590	1675	42	36	42	852.01.16.940.0	1590	1685	48	36	52
1600	1640	852.01.06.960.0	1760	1830	36	40	32	852.01.10.960.0	1890	1915	48	40	46	852.01.16.960.0	1820	1930	55	40	58

7.6.24 Çelik Kör Flaş (Galvaniz Kaplı)



DIN 2501
TS ISO 7005-1

Tablo 7.29 PE 100 Çelik Kör Flaş (Galvaniz Kaplı) Ölçü Tablosu

da mm	PN 6						PN 10						PN 16					
	Kodu	K mm	D mm	d mm	n mm	b mm	Kodu	K mm	D mm	d mm	n mm	b mm	Kodu	K mm	D mm	d mm	n mm	b mm
20	852.01.06.020.0	55	80	11	4	12	852.01.10.020.0	85	95	14	4	14	852.01.16.020.0	65	95	14	4	14
25	852.01.06.025.0	65	90	11	4	14	852.01.10.025.0	75	105	14	4	16	852.01.16.025.0	75	105	14	4	16
32	852.01.06.032.0	75	100	11	4	14	852.01.10.032.0	85	115	14	4	16	852.01.16.032.0	85	115	14	4	16
40	852.01.06.040.0	90	120	14	4	14	852.01.10.040.0	100	140	18	4	16	852.01.16.040.0	100	140	18	4	16
50	852.01.06.050.0	100	130	14	4	14	852.01.10.050.0	110	150	18	4	16	852.01.16.050.0	110	150	18	4	16
63	852.01.06.063.0	110	140	14	4	14	852.01.10.063.0	125	165	18	4	18	852.01.16.063.0	125	165	18	4	18
75	852.01.06.075.0	130	160	14	4	14	852.01.10.075.0	145	185	18	4	18	852.01.16.075.0	145	185	18	4	18
90	852.01.06.090.0	150	190	18	4	16	852.01.10.090.0	160	200	18	8	20	852.01.16.090.0	160	200	18	8	20
110	852.01.06.110.0	170	210	18	4	16	852.01.10.110.0	180	220	18	8	20	852.01.16.110.0	180	220	18	8	20
125	852.01.06.125.0	170	210	18	4	16	852.01.10.125.0	180	220	18	8	20	852.01.16.125.0	180	220	18	8	20
140	852.01.06.140.0	200	240	18	8	18	852.01.10.140.0	210	250	18	8	22	852.01.16.140.0	210	250	18	8	22
160	852.01.06.160.0	225	265	18	8	18	852.01.10.160.0	240	285	22	8	22	852.01.16.160.0	240	285	22	8	22
180	852.01.06.180.0	225	265	18	8	18	852.01.10.180.0	240	285	22	8	22	852.01.16.180.0	240	285	22	8	22
200	852.01.06.200.0	280	320	18	8	20	852.01.10.200.0	295	340	22	8	24	852.01.16.200.0	295	340	22	12	24
225	852.01.06.225.0	280	320	18	8	20	852.01.10.225.0	295	340	22	8	24	852.01.16.225.0	295	340	22	12	24
250	852.01.06.250.0	335	375	18	12	22	852.01.10.250.0	350	395	22	12	26	852.01.16.250.0	355	405	26	12	26
280	852.01.06.280.0	335	375	18	12	22	852.01.10.280.0	350	395	22	12	26	852.01.16.280.0	355	405	26	12	26
315	852.01.06.315.0	395	440	22	12	22	852.01.10.315.0	400	445	22	12	26	852.01.16.315.0	410	460	26	12	28
355	852.01.06.355.0	445	490	22	12	22	852.01.10.355.0	460	505	22	16	26	852.01.16.355.0	470	520	26	16	30
400	852.01.06.400.0	495	540	22	16	22	852.01.10.400.0	515	565	26	16	26	852.01.16.400.0	525	580	30	16	32
450	852.01.06.450.0	550	595	22	16	24	852.01.10.450.0	565	615	26	20	28	852.01.16.450.0	585	640	30	20	34
500	852.01.06.500.0	600	645	22	20	24	852.01.10.500.0	620	670	26	20	28	852.01.16.500.0	650	715	33	20	34
560	852.01.06.560.0	705	755	26	20	24	852.01.10.560.0	725	780	30	20	28	852.01.16.560.0	770	840	36	20	36
630	852.01.06.630.0	705	755	26	20	24	852.01.10.630.0	725	780	30	20	28	852.01.16.630.0	770	840	36	20	36
710	852.01.06.710.0	810	860	26	24	24	852.01.10.710.0	840	895	30	24	30	852.01.16.710.0	840	910	36	24	36
800	852.01.06.800.0	920	975	30	24	24	852.01.10.800.0	950	1015	33	24	32	852.01.16.800.0	950	1025	39	24	38
900	852.01.06.900.0	1020	1075	30	24	26	852.01.10.900.0	1050	1115	33	28	34	852.01.16.900.0	1050	1125	39	28	40
1000	852.01.06.910.0	1120	1175	30	28	26	852.01.10.910.0	1160	1230	36	28	34	852.01.16.910.0	1170	1255	42	28	42
1200	852.01.06.920.0	1340	1405	33	32	28	852.01.10.920.0	1380	1455	39	32	38	852.01.16.920.0	1390	1485	48	32	48
1400	852.01.06.940.0	1560	1630	36	36	32	852.01.10.940.0	1590	1675	42	36	42	852.01.16.940.0	1590	1685	48	36	52
1600	852.01.06.960.0	1760	1830	36	40	32	852.01.10.960.0	1890	1915	48	40	46	852.01.16.960.0	1820	1930	55	40	58